


Bearing No. RASEA25-N

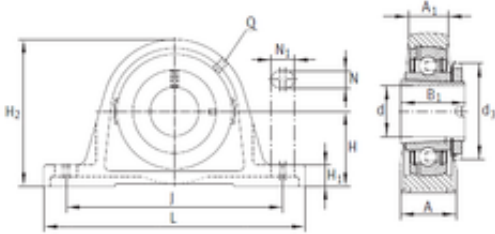

N	11 mm
d	25 mm
A	36 mm
H	36,5 mm
J	103 mm
L	130 mm
N1	19 mm
d3	38 mm
A1	21 mm
B1	28 mm
H1	14,5 mm
H2	70 mm
Noun	Bearing
Bore	0.984 Inch 25 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	0,6 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	1.323
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Standard Shaft Height
Bearing number	RASEA25-N

Mounting Method	Adapter Sleeve
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ina.com
Length Thru Bore	1.102 Inch 28 Millimeter
Long Description	2 Bolt Pillow Block; 25MM Bore; 37MM Base to Center Height; Adapter Sleeve Mount; Ball Bearing; 95MM Minimum Bolt Spacing; 111MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding Rub
Housing Material	Cast Iron
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	0.6
Insert Part Number	GSH25RRB
Bore Diameter (mm)	25
Minimum Buy Quantity	N/A
Bolt Spacing Maximum	4.37 Inch 111Millimeter
Bolt Spacing Minimum	3.74 Inch 95Millimeter
Base to Center Height	1.457 Inch 37 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RASEA25N
Number of Mounting Holes	2
Expansion / Non-expansion	Non-expansion
Actual Bolt Center to Center	0 Inch 0Millimeter
Nominal Bolt Center to	4.1 Inch 105 Millimeter

Center	
Basic dynamic load rating (C)	13,6 kN