


Bearing No. RASEL30-N

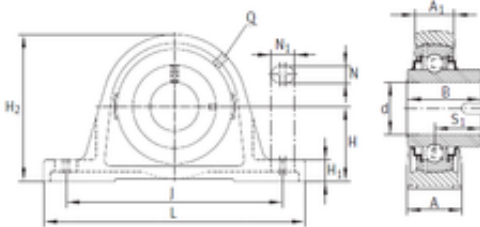

N	14 mm
d	30 mm
A	40 mm
B	36,5 mm
H	42,9 mm
J	118 mm
L	158 mm
N1	22 mm
S1	22 mm
A1	25 mm
H1	17 mm
H2	82 mm
Noun	Bearing
Bore	1.181 Inch 30 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	1,1 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	2.867
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Non Locating Bearing
Bearing number	RASEL30-N

Mounting Method	Drive Slot
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ina.com
Long Description	2 Bolt Pillow Block; 30MM Bore; 42.9MM Base to Center Height; Drive Slot Mount; Ball Bearing; 108MM Minimum Bolt Spacing; 127MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding Rubb
Length Thru Bore	1.906 Inch 48.42 Millimeter
Housing Material	Cast Iron
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	1.03
Insert Part Number	GLE30KRRB
Bore Diameter (mm)	30
Minimum Buy Quantity	N/A
Bolt Spacing Maximum	5 Inch 127Millimeter
Bolt Spacing Minimum	4.252 Inch 108Millimeter
Base to Center Height	1.689 Inch 42.9 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RASEL30N
Number of Mounting Holes	2
Expansion / Non- expansion	Expansion
Actual Bolt Center to Center	0 Inch 0Millimeter

Basic dynamic load rating (C)	19,5 kN
Nominal Bolt Center to Center	4.6 Inch 118 Millimeter