


Bearing No. RASEY50-N

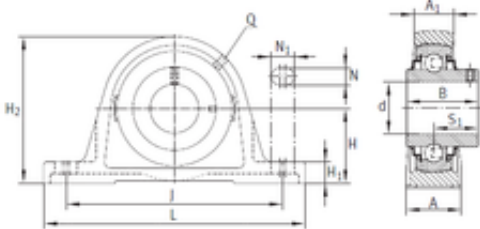

| | |
|----------------|------------------------------------|
| N | 18 mm |
| d | 50 mm |
| A | 54 mm |
| B | 51,6 mm |
| H | 57,2 mm |
| J | 158 mm |
| L | 200 mm |
| N1 | 23 mm |
| S1 | 32,6 mm |
| A1 | 34 mm |
| H1 | 21,5 mm |
| H2 | 115 mm |
| Noun | Bearing |
| Bore | 1.969 Inch 50 Millimeter |
| Seals | Double Land Riding Rubber Contact |
| UNSPSC | 31171511 |
| Weight | 2,6 Kg |
| Category | Pillow Block |
| Inventory | 0.0 |
| Thread (Q) | Rp1/8 |
| Weight / LBS | 7.06 |
| Product Group | M06110 |
| Inch - Metric | Metric |
| Housing Style | 2 Bolt Pillow Block |
| Relubricatable | Yes |
| Keyword String | Pillow Block |
| Other Features | Single Row Standard Shaft Height |
| Bearing number | RASEY50-N |

| | |
|---------------------------------|--|
| Mounting Method | Set Screw |
| Rolling Element | Ball Bearing |
| Housing Material | Cast Iron |
| Length Thru Bore | 2.031 Inch 51.59 Millimeter |
| Long Description | 2 Bolt Pillow Block; 50MM Bore; 57.2MM Base to Center Height; Set Screw Mount; Ball Bearing; 151.5MM Minimum Bolt Spacing; 163.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding R |
| Manufacturer URL | http://www.ina.com |
| Manufacturer Name | SCHAEFFLER GROUP |
| Weight / Kilogram | 2.62 |
| Insert Part Number | GYE50KRRB |
| Bore Diameter (mm) | 50 |
| Minimum Buy Quantity | N/A |
| Bolt Spacing Maximum | 6.437 Inch 163.5Millimeter |
| Bolt Spacing Minimum | 5.965 Inch 151.5Millimeter |
| Housing Configuration | 1 Piece Solid |
| Base to Center Height | 2.252 Inch 57.2 Millimeter |
| Harmonized Tariff Code | 8483.20.40.40 |
| Manufacturer Item Number | RASEY50 |
| Number of Mounting Holes | 2 |
| Expansion / Non- expansion | Non-expansion |
| Actual Bolt Center to Center | 0 Inch 0Millimeter |

| | |
|-------------------------------|---------------------------|
| Basic dynamic load rating (C) | 35 kN |
| Nominal Bolt Center to Center | 6.3 Inch 160 Millimeter |