


Bearing No. RASEY75

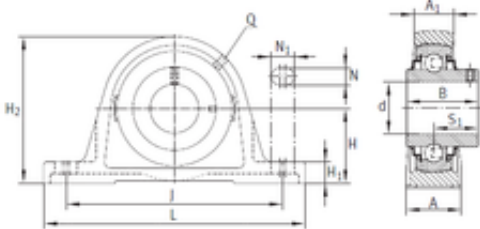

| | |
|----------------|------------------------------------|
| J | 210 mm |
| H | 82,5 mm |
| d | 75 mm |
| N | 22 mm |
| L | 265 mm |
| A | 66 mm |
| B | 77,8 mm |
| H2 | 164 mm |
| N1 | 30 mm |
| H1 | 27,5 mm |
| A1 | 48 mm |
| S1 | 44,5 mm |
| Bore | 2.953 Inch 75 Millimeter |
| Noun | Bearing |
| Seals | Double Land Riding Rubber Contact |
| UNSPSC | 31171511 |
| Weight | 6,51 Kg |
| Category | Pillow Block |
| Inventory | 0.0 |
| Thread (Q) | Rp1/8 |
| Weight / LBS | 15.85 |
| Inch - Metric | Metric |
| Housing Style | 2 Bolt Pillow Block |
| Product Group | M06110 |
| Other Features | Single Row Standard Shaft Height |
| Keyword String | Pillow Block |
| Mounting Bolts | 24 Millimeter |
| Relubricatable | Yes |

| | |
|-------------------------------|--|
| Bearing number | RASEY75 |
| Mounting Method | Set Screw |
| Rolling Element | Ball Bearing |
| Manufacturer URL | http://www.ina.com |
| Length Thru Bore | 3.063 Inch 77.8 Millimeter |
| Long Description | 2 Bolt Pillow Block; 75MM Bore; 82.6MM Base to Center Height; Set Screw Mount; Ball Bearing; 204MM Minimum Bolt Spacing; 218MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding Rubbe |
| Housing Material | Cast Iron |
| Manufacturer Name | SCHAEFFLER GROUP |
| Weight / Kilogram | 9.161 |
| Insert Part Number | GYE75KRRB |
| Bore Diameter (mm) | 75 |
| Bolt Spacing Minimum | 8.031 Inch 204Millimeter |
| Bolt Spacing Maximum | 8.583 Inch 218Millimeter |
| Minimum Buy Quantity | N/A |
| Base to Center Height | 3.252 Inch 82.6 Millimeter |
| Housing Configuration | 1 Piece Solid |
| Harmonized Tariff Code | 8483.20.40.40 |
| Manufacturer Item Number | RASEY75 |
| Number of Mounting Holes | 2 |
| Expansion / Non- expansion | Non-expansion |
| | |

| | |
|-------------------------------|-----------------------------|
| Actual Bolt Center to Center | 0 Inch 0Millimeter |
| Nominal Bolt Center to Center | 8.5 Inch 215.5 Millimeter |
| Basic dynamic load rating (C) | 62 kN |