


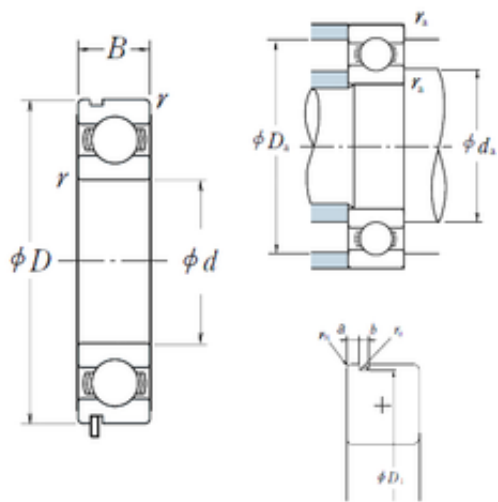

Bearing No. 60/32N

|      |         |
|------|---------|
| a    | 2,08 mm |
| r    | 1       |
| d    | 32 mm   |
| D    | 58 mm   |
| B    | 13 mm   |
| C    | 13 mm   |
| b    | 1,35 mm |
| fo   | 14.5    |
| B_   | 13      |
| ra   | 1       |
| C0   | 9.15    |
| D1   | 55,6 mm |
| D_   | 58      |
| Z_   | 10      |
| rn   | 0,5 mm  |
| ro   | 0.4     |
| DE_  | 52.938  |
| SRI  | 4.01    |
| D_a  | 53      |
| DA_  | 7.938   |
| SRE  | 4.21    |
| DI_  | 37.062  |
| yobi | 60/32N  |
| mass | 0.122   |
| SBRG | 10      |
| bomp | 0       |
| KBRG | 6101    |
| SREX | 0.04    |
| SREN | 0       |
| SRIN | 0       |
|      |         |

|                               |              |
|-------------------------------|--------------|
| SDM_                          | 45           |
| SRIX                          | 0.02         |
| ALPHA_                        | 0            |
| r min.                        | 1 mm         |
| C_conv                        | 15100        |
| da max                        | 38,5 mm      |
| da min                        | 37           |
| Weight                        | 0,122 Kg     |
| LangID                        | 1            |
| ra max.                       | 1 mm         |
| Da max.                       | 53 mm        |
| Oil rpm                       | 14000        |
| da min.                       | 37 mm        |
| r0 max.                       | 0,4 mm       |
| hidYobi                       | 60/32N       |
| GRS rpm                       | 12000        |
| hidTable                      | ecat_NSRDGB  |
| Size (mm)                     | 32x58x13     |
| Prod_Type3                    | DGBB_SR_N_OT |
| Width (mm)                    | 13           |
| Bearing number                | 60/32N       |
| Bore Diameter (mm)            | 32           |
| Outer Diameter (mm)           | 58           |
| (Oil) Lubrication Speed       | 14 000 r/min |
| (Grease) Lubrication Speed    | 12 000 r/min |
| Basic dynamic load rating (C) | 15,1 kN      |
| Basic static load rating (C0) | 9,15 kN      |