


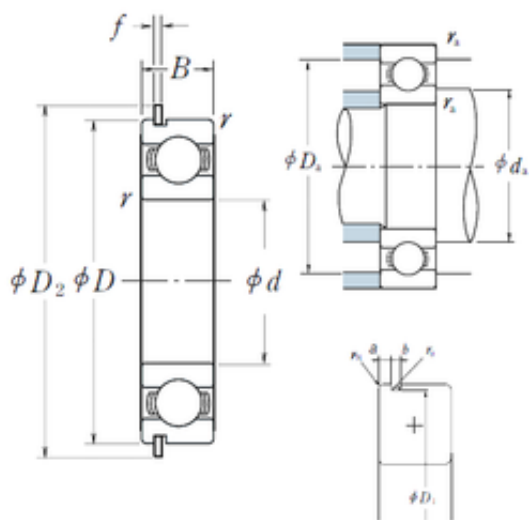

Bearing No. 60/32NR

f	1,12 mm
r	1
d	32 mm
D	58 mm
B	13 mm
C	13 mm
a	2,08 mm
b	1,35 mm
D2	63,7 mm
B_	13
Cy	2.9
ra	1
C0	9.15
fo	14.5
D_	58
D1	55,6 mm
rn	0,5 mm
Z_	10
Dx	64.5
ro	0.4
DE_	52.938
DA_	7.938
SRI	4.01
D_a	53
SRE	4.21
DI_	37.062
SRIN	0
yobi	60/32NR
SBRG	10
bomp	0

SREX	0.04
KBRG	6101
SREN	0
SDM_	45
SRIX	0.02
mass	0.122
C_conv	15100
r min.	1 mm
da max	38,5 mm
ALPHA_	0
Weight	0,122 Kg
da min	37
LangID	1
GRS rpm	12000
Da max.	53 mm
hidYobi	60/32NR
Oil rpm	14000
da min.	37 mm
r0 max.	0,4 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Size (mm)	32x58x13
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	13
Bearing number	60/32NR
Bore Diameter (mm)	32
Outer Diameter (mm)	58
(Oil) Lubrication Speed	14 000 r/min
(Grease) Lubrication Speed	12 000 r/min
Basic dynamic load rating (C)	15,1 kN
Basic static load rating	9,15 kN

(C0)	
------	--