


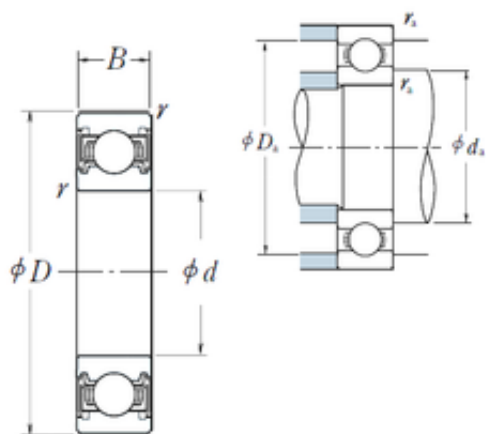

Bearing No. 60/32VV

r	1
d	32 mm
D	58 mm
B	13 mm
C	13 mm
fo	14.5
D_	58
B_	13
ra	1
Z_	10
C0	9.15
DI_	37.062
SRE	4.21
D_a	53
DE_	52.938
SRI	4.01
DA_	7.938
SREN	0
Bore	1.26 Inch 32 Millimeter
SRIN	0
bomp	0
SRIX	0.02
yobi	60/32VV
mass	0.122
SDM_	45
KBRG	6151
SREX	0.04
SBRG	10
Noun	Bearing
da max	38,5 mm

Weight	0,122 Kg
LangID	1
r min.	1 mm
da min	37
ALPHA_	0
C_conv	15100
UNSPSC	31171504
da min.	37 mm
hidYobi	60/32VV
GRS rpm	12000
Da max.	53 mm
ra max.	1 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Enclosure	2 Seals
Size (mm)	32x58x13
Inventory	0.0
Prod_Type3	DGBB_SR_VV
Width (mm)	13
Weight / LBS	0.269
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	60/32VV
Enclosure Type	Non-Contact Seal
Other Features	Deep Groove Rubber Seal
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	2.283 Inch 58 Millimeter

Outer Race Width	0.512 Inch 13 Millimeter
Long Description	32MM Bore; 58MM Outside Diameter; 13MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.12
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	32
Outer Diameter (mm)	58
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	12 000 r/min
Basic dynamic load rating (C)	15,1 kN
Basic static load rating (C0)	9,15 kN
Maximum Capacity / Filling Slot	No