


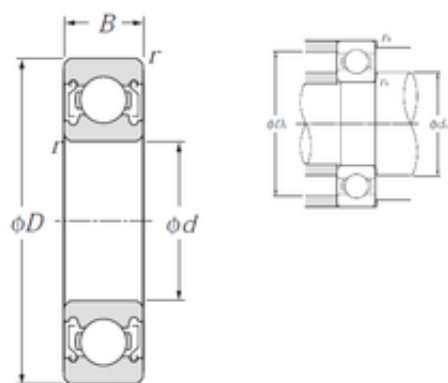

Bearing No. 60/32ZZ

D	58 mm
d	32 mm
B	13 mm
C	13 mm
rn	0,5 mm
Bore	1.26 Inch 32 Millimeter
Noun	Bearing
Weight	0,129 Kg
r min.	1 mm
UNSPSC	31171504
da max	39 mm
da min.	37 mm
Da max.	53 mm
ra max.	1 mm
series:	60
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	32x58x13
Inventory	0.0
Snap Ring	No
Width (mm)	13
bore type:	Round
maximum rpm:	15000 RPM
Weight / LBS	0.042
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Double Shielded
bore diameter:	32 mm
Keyword String	Ball

overall width:	13 mm
cage material:	Steel
fillet radius:	1 mm
Bearing number	60/32ZZ
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	32MM Bore; 58MM Outside Diameter; 13MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.512 Inch 13 Millimeter
Outside Diameter	2.283 Inch 58 Millimeter
outside diameter:	58 mm
outer ring width:	13 mm
inner ring width:	13 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.133
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	32
Outer Diameter (mm)	58
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A

maximum rpm (grease):	12000 rpm
static load capacity:	8050 N
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	11800 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	60/32ZZ/2A
Internal Special Features	No
(Grease) Lubrication Speed	12 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	11,8 kN
Basic static load rating (C0)	8,05 kN
Maximum Capacity / Filling Slot	No