


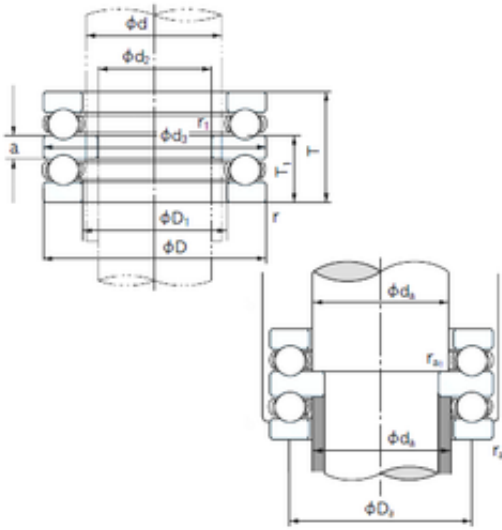

**Bearing No. 52313**

|                               |            |
|-------------------------------|------------|
| d                             | 65 mm      |
| D                             | 115 mm     |
| T                             | 65 mm      |
| a                             | 15 mm      |
| d3                            | 115 mm     |
| D3                            | 120 mm     |
| D2                            | 90 mm      |
| d2                            | 55 mm      |
| D1                            | 67 mm      |
| T1                            | 40 mm      |
| r min.                        | 1.1 mm     |
| Weight                        | 2.90 Kg    |
| r1 min.                       | 0.6 mm     |
| da min.                       | 65 mm      |
| Da max.                       | 85 mm      |
| ra max.                       | 1 mm       |
| ra1 max.                      | 0.6 mm     |
| Size (mm)                     | 65x115x65  |
| Width (mm)                    | 65         |
| Bearing number                | 52313      |
| Bore Diameter (mm)            | 65         |
| Outer Diameter (mm)           | 115        |
| (Grease) Lubrication Speed    | 1500 r/min |
| Basic dynamic load rating (C) | 127 kN     |
| Basic static load rating (C0) | 287 kN     |