


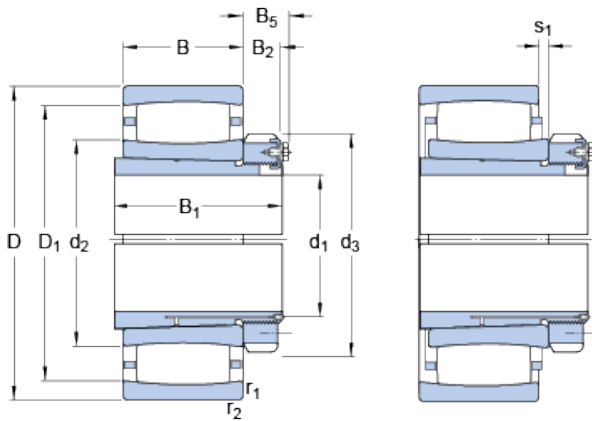

Bearing No. C 3076 KM + OH 3076 H

B	135 mm
D	560 mm
Size (mm)	560x360x193
Width (mm)	193
d ₃	450 mm
d ₃	450 mm
S ₁	27 mm
B ₅	62 mm
B ₂	48 mm
d ₂	431 mm
D ₁	512 mm
d ₁	360 mm
B ₁	193 mm
d ₁	360 mm
B ₂	48 mm
B ₅	62 mm
B ₁	193 mm
Bearing number	C 3076 KM + OH 3076 H
Limiting speed	1200 r/min
Reference speed	900 r/min
Bore Diameter (mm)	560
r _a max.	4 mm
C _a min.	2 mm
B _a min.	15 mm
D _a max.	542 mm
D _a min.	491 mm
d _b min.	396 mm
d _a max.	462 mm

s_1 max.	27 mm
Outer Diameter (mm)	360
$r_{1,2}$ min.	5 mm
C_a - min.	2 mm
B_a - min.	15 mm
D_a - max.	542 mm
d_a - max.	462 mm
d_b - min.	396 mm
r_a - max.	4 mm
D_a - min.	491 mm
Mass bearing + sleeve	145 kg
d_2 ?	431 mm
D_1 ?	512 mm
$r_{1,2}$ - min.	5 mm
Factor - k_1	0.12
Factor - k_2	0.1
Basic dynamic load rating C	3000 kN
Basic dynamic load rating - C	3000 kN
Fatigue load limit P_u	380 kN
Misalignment factor k_1	0.12
Fatigue load limit - P_u	380 kN
Basic static load rating C_0	5200 kN
Basic static load rating - C_0	5200 kN
Operating clearance factor k_2	0.1