


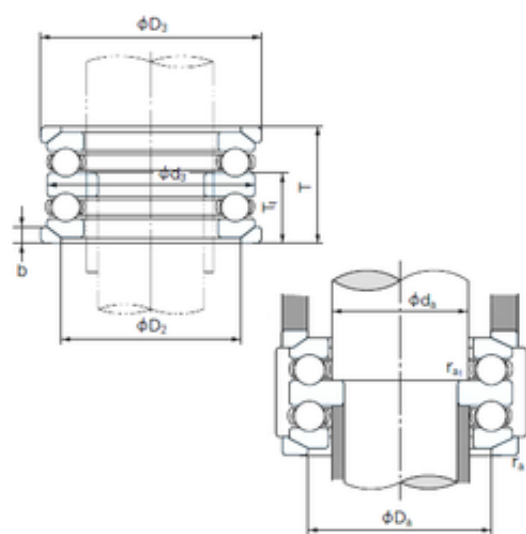

Bearing No. 54414U

|                               |            |
|-------------------------------|------------|
| a                             | 24 mm      |
| d                             | 70 mm      |
| b                             | 19.5 mm    |
| D                             | 150 mm     |
| T                             | 125 mm     |
| d3                            | 150 mm     |
| D3                            | 155 mm     |
| D2                            | 110 mm     |
| D1                            | 73 mm      |
| T1                            | 74.5 mm    |
| d2                            | 55 mm      |
| r min.                        | 2 mm       |
| Weight                        | 11.5 Kg    |
| Da max.                       | 110 mm     |
| r1 min.                       | 1 mm       |
| ra max.                       | 2 mm       |
| da min.                       | 70 mm      |
| ra1 max.                      | 1 mm       |
| Size (mm)                     | 70x150x125 |
| Width (mm)                    | 125        |
| Bearing number                | 54414U     |
| Bore Diameter (mm)            | 70         |
| Outer Diameter (mm)           | 150        |
| (Grease) Lubrication Speed    | 1000 r/min |
| Basic dynamic load rating (C) | 250 kN     |
| Basic static load rating (C0) | 555 kN     |