


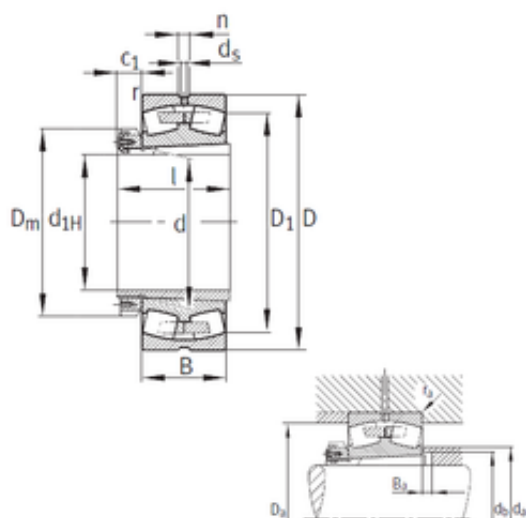

Bearing No. 239/750-K-MB+H39/750

|                         |                      |
|-------------------------|----------------------|
| C                       | 185 mm               |
| l                       | 291 mm               |
| n                       | 23,5 mm              |
| d                       | 750 mm               |
| D                       | 1 000 mm             |
| B                       | 185 mm               |
| D1                      | 923,2 mm             |
| C1                      | 111 mm               |
| d5                      | 12,5 r/min           |
| Dm                      | 870 mm               |
| d1                      | 710 mm               |
| Weight                  | 609 Kg               |
| r min.                  | 6 mm                 |
| da max                  | 810 mm               |
| db min                  | 771 mm               |
| ba min.                 | 23 mm                |
| Da max.                 | 977 mm               |
| ra max.                 | 5 mm                 |
| Size (mm)               | 750x1000x185         |
| Width (mm)              | 185                  |
| Limiting speed          | 480 r/min            |
| Bearing number          | 239/750-K-MB+H39/750 |
| Reference speed         | 325 r/min            |
| Bore Diameter (mm)      | 750                  |
| Outer Diameter (mm)     | 1000                 |
| Calculation factor (e)  | 0,17                 |
| Fatigue load limit (Pu) | 790                  |
| Calculation factor (Y0) | 3,86                 |
| Calculation factor (Y1) | 3,95                 |
| Basic dynamic load      | 5200 kN              |

|                               |          |
|-------------------------------|----------|
| rating (C)                    |          |
| Basic static load rating (C0) | 12900 kN |