


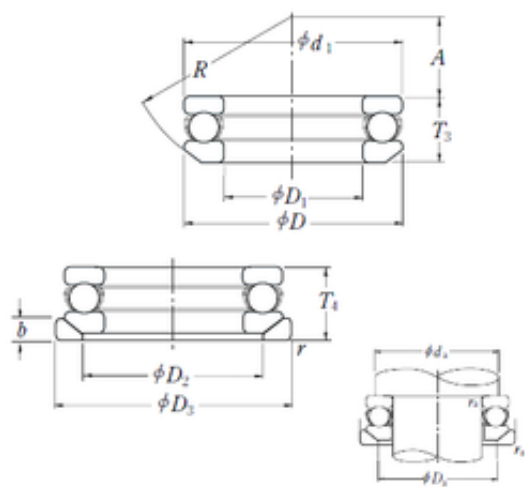

Bearing No. 53216U

C	79
D	115 mm
R	90 mm
A	46 mm
T	33 mm
b	10 mm
d	80 mm
r	1
A_	46
D_	115
Z_	22
da	101
T3	29.5
C0	218
T4	33
ra	1
B_	33
R_	90
D2	98 mm
D3	120 mm
D1	82 mm
d1	115 mm
D_2	98
D_3	120
SRE	6.85
D_1	82
SRI	6.85
DA_	12.7
D_a	94
SREX	0.05

SRIN	0
SREN	0
mass	1.23
yobi	53216U
SDM_	97.5
SRIX	0.05
KBRG	5131
r min.	1 mm
LangID	1
Weight	1,23 Kg
ra max.	1 mm
GRS rpm	1800
Oil rpm	2600
da min.	101 mm
Da max.	94 mm
hidYobi	53216U
hidTable	ecat_NSSDTB
Size (mm)	80x115x33
Prod_Type3	TB_SD_WASW
Width (mm)	33
Bearing number	53216U
Bore Diameter (mm)	80
Outer Diameter (mm)	115
(Grease) Lubrication Speed	1800 r/min
Basic static load rating (C0)	218 kN
Basic dynamic load rating (C)	79 kN