


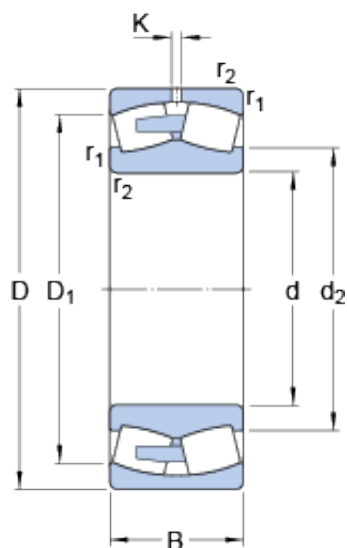

Bearing No. 238/750 CAMA/W20

K	12 mm
d	750 mm
D	920 mm
B	128 mm
Size (mm)	920x750x128
Width (mm)	128
Mass bearing	185 kg
D_1	873 mm
d_2	812 mm
Bearing number	238/750 CAMA/W20
Limiting speed	600 r/min
Reference speed	340 r/min
r_a max.	4 mm
D_a max.	902 mm
d_a min.	768 mm
Bore Diameter (mm)	920
Outer Diameter (mm)	750
r_a - max.	4 mm
Calculation factor e	0.11
d_a - min.	768 mm
D_a - max.	902 mm
$r_{1,2}$ min.	5 mm
D_1 ?	873 mm
d_2 ?	812 mm
$r_{1,2}$ - min.	5 mm
Calculation factor - e	0.11
Basic dynamic load rating C	3405 kN
Basic dynamic load rating - C	3405 kN

Fatigue load limit P_u	550 kN
Calculation factor Y_1	6.1
Calculation factor Y_2	9.1
Calculation factor Y_0	6.3
Calculation factor - Y_0	6.3
Calculation factor - Y_2	9.1
Calculation factor - Y_1	6.1
Fatigue load limit - P_u	550 kN
Basic static load rating C_0	8500 kN
Basic static load rating - C_0	8500 kN