


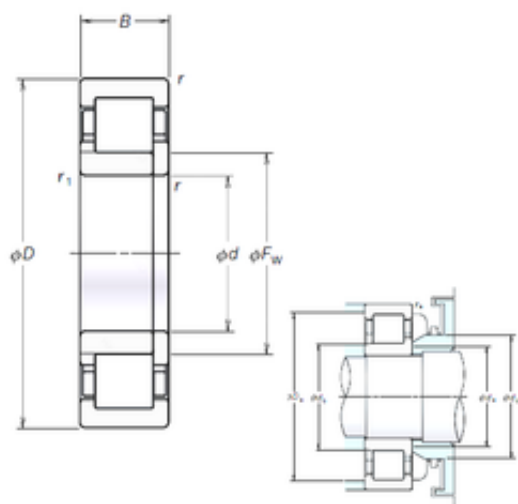

Bearing No. NUP2338EM

r	5
D	400 mm
C	132 mm
S	6,2 mm
B	132 mm
d	190 mm
Fw	240 mm
Z_	14
r1	5
da	210
C0	2520
ra	4
rb	4
B_	132
D_	400
DA_	56
DE_	352
DI_	240
yobi	NUP2338EM
mass	88.1
SDM_	296
KBRG	4165
SBRG	23
db min	210 mm
C_conv	1770000
Db max	380 mm
r min.	5 mm
ALPHA_	0
LangID	1
dd min	268

dc min	248
Weight	86,2 Kg
db max	235
da min.	210 mm
D_a max	380
r1 min.	5 mm
rb max.	4 mm
TSR rpm	1400
Da max.	380 mm
GRS rpm	1300
Oil rpm	1600
ra max.	4 mm
hidYobi	NUP2338EM
db max.	235 mm
hidTable	ecat_NSCLDR
Macha rpm	2000
Size (mm)	190x400x132
Prod_Type3	CRB_SR_NUP
Width (mm)	132
Bearing number	NUP2338EM
Bore Diameter (mm)	190
Outer Diameter (mm)	400
(Grease) Lubrication Speed	1300 r/min
Basic static load rating (C0)	2520 kN
Basic dynamic load rating (C)	1770 kN