


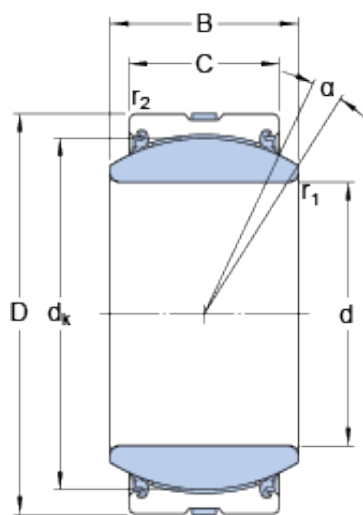

Bearing No. GE 120 TXG3A-2LS

C	70 mm
d	120 mm
D	180 mm
B	85 mm
?	6 °
Noun	Bearing
Bore	4.724 Inch 120 Millimeter
UNSPSC	31171515
?	6 °
Category	Plain Bearings Spherical Radial
Inventory	0.0
Lubricant	Maintenance free – dry lubrication
Size (mm)	180x120x85
Enclosure	2 Seals
Keyword 3	Spherical
Width (mm)	85
Weight / LBS	18.188
Inch - Metric	Metric
Self Aligning	Yes
Overall Width	3.346 Inch 85 Millimeter
Housing Width	2.756 Inch 70 Millimeter
Product Group	B04264
d _k	160 mm
d _k	160 mm
Keyword String	Plain Spherical Radial
Other Features	2 Piece Corrosion Resistance Axially Split

	Outer Ring Self Lubricating Triple Lip Heavy Duty Seals
Bearing number	GE 120 TXG3A-2LS
Relubricatable	No
Rolling Element	Spherical Plain
Material - Ball	Stainless Steel
Sealing solution	Triple-lip seals
Outside Diameter	7.087 Inch 180 Millimeter
Manufacturer URL	http://www.skf.com
Long Description	120MM Bore; 70MM Housing Width; 180MM Outside Diameter; Spherical Plain; Stainless Steel Outer Member; Stainless Steel Ball; Teflon Liner; 85MM Overall Width; Not Relubricatable
Material - Liner	Teflon
Manufacturer Name	SKF
Weight / Kilogram	7.723
r_a max.	1 mm
D_a max.	172 mm
D_a min.	157.5 mm
d_a max.	135.5 mm
d_a min.	130 mm
r_2 min.	1 mm
r_1 min.	1 mm
Bore Diameter (mm)	180
r_b max.	1 mm
Mass plain bearing	8.25 kg
Outer Diameter (mm)	120
d_a - max.	135.5 mm
Minimum Buy Quantity	N/A

r_b - max.	1 mm
r_a - max.	1 mm
D_a - max.	172 mm
d_a - min.	130 mm
r_1 - min.	1 mm
D_a - min.	157.5 mm
r_2 - min.	1 mm
Harmonized Tariff Code	8483.30.80.70
Material - Outer Member	Stainless Steel
Manufacturer Item Number	GE 120 TXG3A-2LS
Basic dynamic load rating C	2700 kN
Basic dynamic load rating - C	2700 kN
Specific dynamic load factor K	300 N/mm ²
Specific factor dinamic load - K	300 N/mm ²
Basic static load rating C_0	4500 kN
Basic static load rating - C_0	4500 kN
Specific static load factor K_0	500 N/mm ²
Specific factor static load - K_0	500 N/mm ²
Design (sliding contact surface combination)	Steel/PTFE fabric