


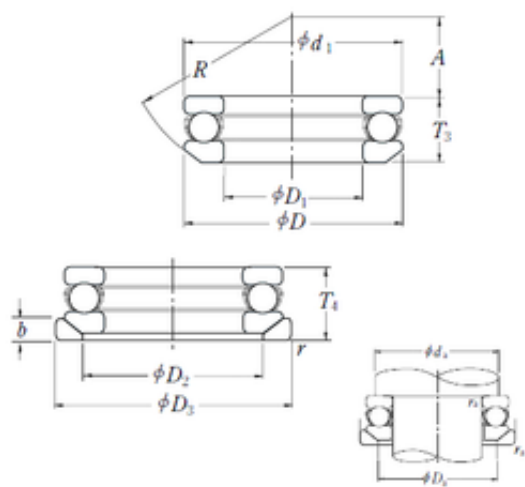

Bearing No. 53252XU

C	435
D	360 mm
R	280 mm
A	152 mm
T	93 mm
b	30 mm
d	260 mm
r	2.1
A_	152
D_	360
Z_	24
da	319
T3	82.8
C0	1800
T4	93
ra	2
B_	93
R_	280
D2	305 mm
D3	370 mm
D1	264 mm
d1	355 mm
D_2	305
D_3	370
SRE	18.85
D_1	264
SRI	18.85
DA_	34.925
D_a	301
SREX	0.125

SRIN	0
SREN	0
mass	33.2
yobi	53252XU
SDM_	310
SRIX	0.125
KBRG	513
r min.	2,1 mm
LangID	1
Weight	33,2 Kg
ra max.	2 mm
GRS rpm	560
Oil rpm	850
da min.	319 mm
Da max.	301 mm
hidYobi	53252XU
hidTable	ecat_NSSDTB
Size (mm)	260x360x93
Prod_Type3	TB_SD_WASW
Width (mm)	93
Bearing number	53252XU
Bore Diameter (mm)	260
Outer Diameter (mm)	360
(Grease) Lubrication Speed	560 r/min
Basic static load rating (C0)	1800 kN
Basic dynamic load rating (C)	435 kN