




Bearing No. 230/500-B-K-MB+AHX30/500

n	23,5 mm
C	167 mm
b	40 mm
a	12 mm
l	209 mm
d	500 mm
D	720 mm
B	167 mm
d5	12,5 r/min
D1	653,5 mm
d1	480 mm
Weight	261,5 Kg
r min.	6 mm
da min.	523 mm
Da max.	697 mm
ra max.	5 mm
Size (mm)	500x720x167
Width (mm)	167
Thread (G)	Tr540X6
Limiting speed	670 r/min
Bearing number	230/500-B-K-MB+AHX30/500
Reference speed	520 r/min
Bore Diameter (mm)	500
Outer Diameter (mm)	720
Calculation factor (e)	0,22
Fatigue load limit (Pu)	510
Calculation factor (Y0)	2,94
Calculation factor (Y1)	3,01
Basic dynamic load rating (C)	3900 kN

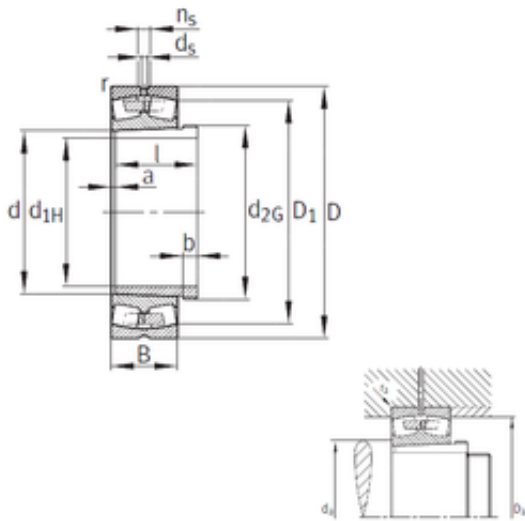

Loyal | 230/500-B-K-MB+AHX30/500

Basic static load rating (C0)	8500 kN
----------------------------------	---------