


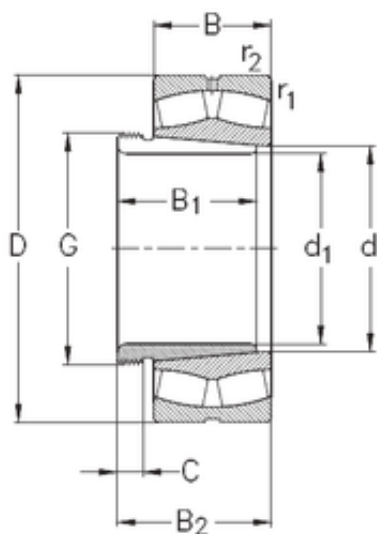

Bearing No. 230/500-K-MB-W33+AHX30/500

|                               |                            |
|-------------------------------|----------------------------|
| d                             | 500 mm                     |
| D                             | 720 mm                     |
| B                             | 167 mm                     |
| C                             | 40 mm                      |
| d1                            | 480 mm                     |
| B1                            | 209 mm                     |
| B2                            | 221 mm                     |
| Weight                        | 314,5 Kg                   |
| r2 min.                       | 6 mm                       |
| r1 min.                       | 6 mm                       |
| Size (mm)                     | 500x720x167                |
| Thread (G)                    | Tr 540x6                   |
| Width (mm)                    | 167                        |
| Limiting speed                | 900 r/min                  |
| Bearing number                | 230/500-K-MB-W33+AHX30/500 |
| Bore Diameter (mm)            | 500                        |
| Outer Diameter (mm)           | 720                        |
| Calculation factor (e)        | 0,22                       |
| Calculation factor (Y0)       | 2,9                        |
| Calculation factor (Y1)       | 3                          |
| Basic dynamic load rating (C) | 3830 kN                    |
| Basic static load rating (C0) | 7970 kN                    |