




Bearing No. 23284-B-K-MB+H3284

|                         |                    |
|-------------------------|--------------------|
| C                       | 272 mm             |
| l                       | 352 mm             |
| n                       | 23,5 mm            |
| d                       | 420 mm             |
| D                       | 760 mm             |
| B                       | 272 mm             |
| D1                      | 642,2 mm           |
| C1                      | 89 mm              |
| d5                      | 12,5 r/min         |
| Dm                      | 540 mm             |
| d1                      | 400 mm             |
| Weight                  | 631,8 Kg           |
| r min.                  | 7,5 mm             |
| da max                  | 495 mm             |
| db min                  | 449 mm             |
| ba min.                 | 16 mm              |
| Da max.                 | 728 mm             |
| ra max.                 | 6 mm               |
| Size (mm)               | 420x760x272        |
| Width (mm)              | 272                |
| Limiting speed          | 670 r/min          |
| Bearing number          | 23284-B-K-MB+H3284 |
| Reference speed         | 340 r/min          |
| Bore Diameter (mm)      | 420                |
| Outer Diameter (mm)     | 760                |
| Calculation factor (e)  | 0,38               |
| Fatigue load limit (Pu) | 930                |
| Calculation factor (Y0) | 1,73               |
| Calculation factor (Y1) | 1,77               |
| Basic dynamic load      | 6550 kN            |

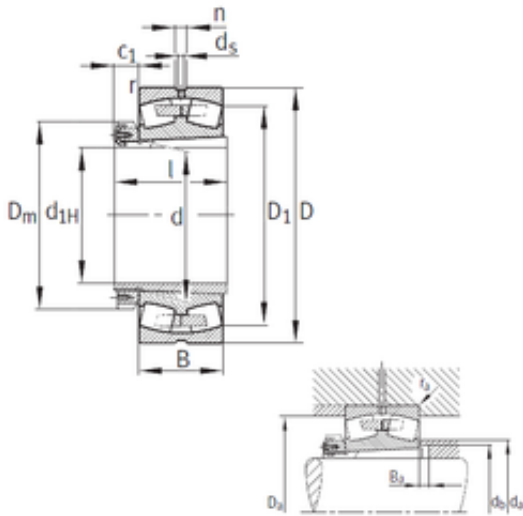

|                               |          |
|-------------------------------|----------|
| rating (C)                    |          |
| Basic static load rating (C0) | 12200 kN |