


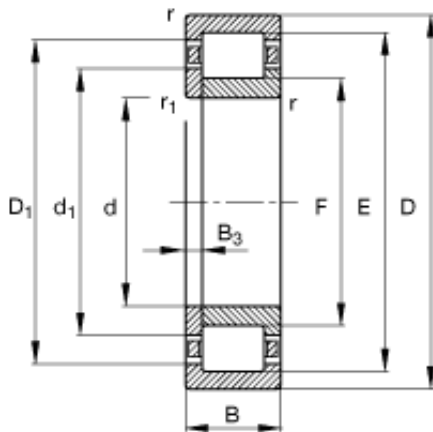

Bearing No. NUP2308-E-TVP2

|                     |                                         |
|---------------------|-----------------------------------------|
| m                   | 0,999 kg / Weight                       |
| d                   | 40 mm                                   |
| D                   | 90 mm                                   |
| B                   | 33 mm                                   |
| E                   | 80 mm                                   |
| F                   | 52 mm                                   |
| Size (mm)           | 40x90x33                                |
| Width (mm)          | 33                                      |
| n <sub>B</sub>      | 6000 1/min / Reference speed            |
| n <sub>G</sub>      | 9500 1/min / Limiting speed             |
| B <sub>3</sub>      | 5,5 mm                                  |
| D <sub>1</sub>      | 75,9 mm                                 |
| d <sub>1</sub>      | 57,6 mm                                 |
| C <sub>r</sub>      | 132000 N / Dynamic load rating (radial) |
| Bearing number      | NUP2308-E-TVP2                          |
| C <sub>0r</sub>     | 119000 N / Static load rating (radial)  |
| C <sub>ur</sub>     | 21600 N / Fatigue limit load, radial    |
| r <sub>min</sub>    | 1,5 mm                                  |
| r <sub>a max</sub>  | 1,5 mm                                  |
| r <sub>1 min</sub>  | 1,5 mm                                  |
| d <sub>c min</sub>  | 60 mm                                   |
| D <sub>a max</sub>  | 81 mm                                   |
| d <sub>a min</sub>  | 49 mm                                   |
| Bore Diameter (mm)  | 40                                      |
| Outer Diameter (mm) | 90                                      |