


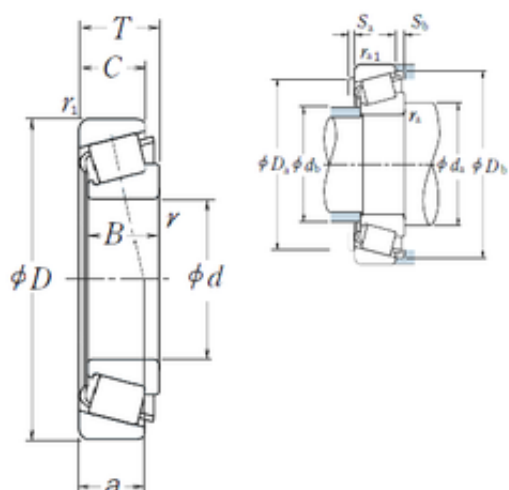

Bearing No. HR33212J

D	110 mm
d	60 mm
T	38 mm
B	38 mm
C	29 mm
a	27,6 mm
e	0.4
Cr	16900
Y0	0.82
db	68
da	72
Y1	1.5
B_	38
Sb	9
C0	231
Sa	6
D_	110
Z_	19
C_	29
C0r	23600
DA_	12.454
Iso	3EE
DE_	96.848
D_b	105
DI_	72.57
SBRG	32
SDM_	84.709
D_a2	94
KBRG	3111
yobi	HR33212J

D_a1	101
mass	1.56
TC-RA	200.144
r min.	2 mm
Weight	1,56 Kg
TC-DA1	13.387
TC-DA2	11.521
TC-SLR	28
Da min	94 mm
LangID	1
ALPHA_	15.083
Db min.	105 mm
Oil rpm	4500
db max.	68 mm
Da max.	101 mm
ra max.	2 mm
hidYobi	HR33212J
da min.	72 mm
T-ALP21	30
rb max.	1,5 mm
T-ALP22	10
T-ALP23	0
GRS rpm	3400
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	2
outer rb	1.5
TC-BET22	50

Size (mm)	60x110x38
Width (mm)	38
Prod_Type3	TRBSR_MD_A
Bearing number	HR33212J
Bore Diameter (mm)	60
Outer Diameter (mm)	110
Calculation factor (e)	0,4
Calculation factor (Y0)	0,82
(Oil) Lubrication Speed	4500 r/min
(Grease) Lubrication Speed	3400 r/min
Basic dynamic load rating (C)	166 kN
Basic static load rating (C0)	231 kN