


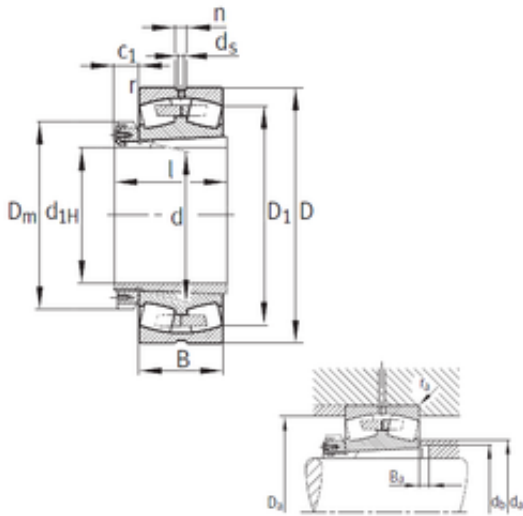

Bearing No. 230/750-K-MB+H30/750

C	250 mm
l	356 mm
n	23,5 mm
d	750 mm
D	1 090 mm
B	250 mm
D1	990,9 mm
C1	111 mm
d5	12,5 r/min
Dm	870 mm
d1	710 mm
Weight	1042 Kg
r min.	7,5 mm
da max	828 mm
db min	776 mm
ba min.	23 mm
Da max.	1 062 mm
ra max.	6 mm
Size (mm)	750x1090x250
Width (mm)	250
Limiting speed	450 r/min
Bearing number	230/750-K-MB+H30/750
Reference speed	305 r/min
Bore Diameter (mm)	750
Outer Diameter (mm)	1090
Calculation factor (e)	0,22
Fatigue load limit (Pu)	1010
Calculation factor (Y0)	2,94
Calculation factor (Y1)	3,01
Basic dynamic load	8500 kN

rating (C)	
Basic static load rating (C0)	19000 kN