


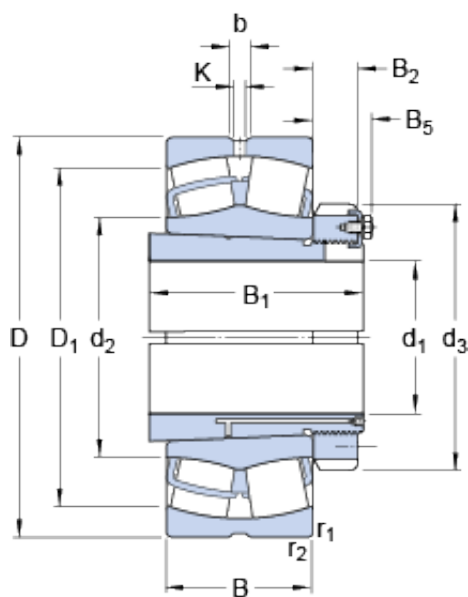

Bearing No. 23264 CCK/W33 + OH 3264 H

K	12 mm
b	22.3 mm
D	580 mm
B	208 mm
Size (mm)	580x300x208
Width (mm)	208
D ₁	493 mm
B ₁	258 mm
B ₅	56 mm
B ₂	42 mm
d ₃	400 mm
B ₁	258 mm
d ₁	300 mm
d ₂	382 mm
d ₁	300 mm
B ₂	42 mm
B ₅	56 mm
d ₃	400 mm
Bearing number	23264 CCK/W33 + OH 3264 H
Limiting speed	950 r/min
Reference speed	700 r/min
Bore Diameter (mm)	580
r _a max.	4 mm
B _a min.	13 mm
D _a max.	560 mm
d _b min.	343 mm
d _a max.	382 mm
Outer Diameter (mm)	300

d_a - max.	382 mm
Calculation factor e	0.35
$r_{1,2}$ min.	5 mm
r_a - max.	4 mm
B_a - min.	13 mm
D_a - max.	560 mm
d_b - min.	343 mm
D_1 ?	493 mm
d_2 ?	382 mm
Mass bearing + sleeve	260 kg
Calculation factor - e	0.35
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	4607 kN
Basic dynamic load rating - C	4607 kN
Fatigue load limit P_u	475 kN
Calculation factor Y_1	1.9
Calculation factor Y_2	2.9
Calculation factor Y_0	1.8
Calculation factor - Y_2	2.9
Calculation factor - Y_1	1.9
Fatigue load limit - P_u	475 kN
Basic static load rating C_0	6700 kN
Basic static load rating - C_0	6700 kN