


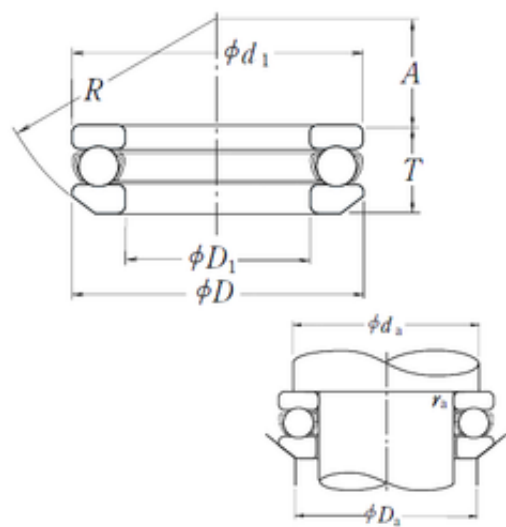

Bearing No. 53328X

C	370
r	2.1
d	140 mm
D	240 mm
T	84,9 mm
A	68 mm
R	180 mm
D_	240
T3	84.9
A_	68
Z_	15
da	199
C0	1130
ra	2
B_	84.9
R_	180
D1	144 mm
d1	235 mm
D_a	181
SRI	18.85
DA_	34.925
D_1	144
SRE	18.85
SRIX	0.125
KBRG	512
SDM_	190
yobi	53328X
SREX	0.125
SREN	0
mass	16.3

SRIN	0
r min.	2,1 mm
Weight	16,3 Kg
LangID	1
ra max.	2 mm
GRS rpm	670
Oil rpm	1000
Da max.	181 mm
da min.	199 mm
hidYobi	53328X
hidTable	ecat_NSSDTB
Size (mm)	140x240x84.9
Width (mm)	84,9
Prod_Type3	TB_SD_WAS
Bearing number	53328X
Bore Diameter (mm)	140
Outer Diameter (mm)	240
(Grease) Lubrication Speed	670 r/min
Basic static load rating (C0)	1130 kN
Basic dynamic load rating (C)	370 kN