


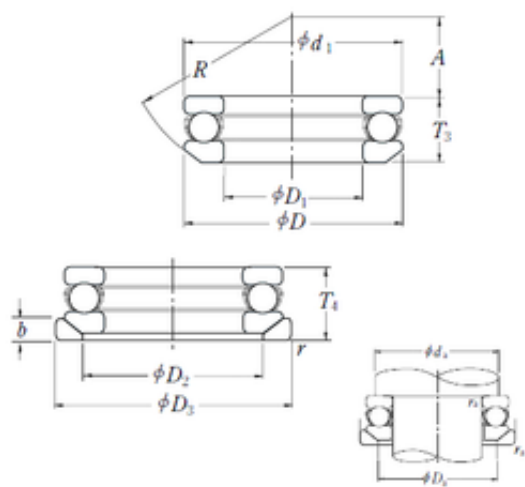

Bearing No. 53328XU

C	370
D	240 mm
R	180 mm
A	68 mm
T	92 mm
b	26 mm
d	140 mm
r	2.1
A_	68
D_	240
Z_	15
da	199
T3	84.9
C0	1130
T4	92
ra	2
B_	92
R_	180
D2	190 mm
D3	250 mm
D1	144 mm
d1	235 mm
D_2	190
D_3	250
SRE	18.85
D_1	144
SRI	18.85
DA_	34.925
D_a	181
SREX	0.125

SRIN	0
SREN	0
mass	19.5
yobi	53328XU
SDM_	190
SRIX	0.125
KBRG	513
r min.	2,1 mm
LangID	1
Weight	19,5 Kg
ra max.	2 mm
GRS rpm	670
Oil rpm	1000
da min.	199 mm
Da max.	181 mm
hidYobi	53328XU
hidTable	ecat_NSSDTB
Size (mm)	140x240x92
Prod_Type3	TB_SD_WASW
Width (mm)	92
Bearing number	53328XU
Bore Diameter (mm)	140
Outer Diameter (mm)	240
(Grease) Lubrication Speed	670 r/min
Basic static load rating (C0)	1130 kN
Basic dynamic load rating (C)	370 kN