


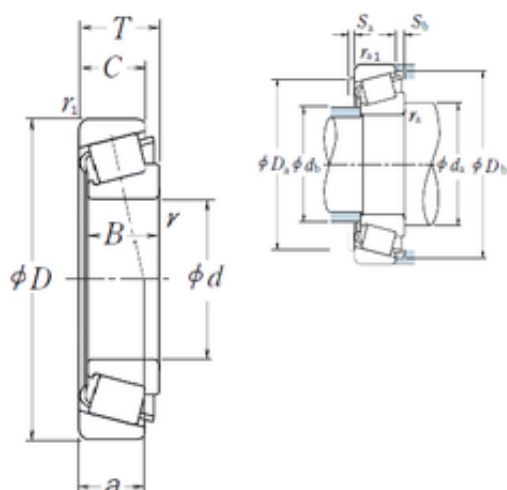

Bearing No. HR32319J

D	200 mm
d	95 mm
T	71,5 mm
B	67 mm
C	55 mm
a	48,6 mm
e	0.35
Cr	53500
Y0	0.96
db	115
da	120
Y1	1.7
B_	67
Sb	16.5
C0	710
Sa	5
D_	200
Z_	16
C_	55
C0r	72500
DA_	27.019
Iso	2GD
DE_	172.968
D_b	186
DI_	120.365
SBRG	23
SDM_	146.667
D_a2	167
KBRG	3111
yobi	HR32319J

D_a1	186
mass	10.4
TC-RA	411.5
r min.	4 mm
Weight	10,4 Kg
TC-DA1	28.72
TC-DA2	25.318
TC-SLR	49
Da min	167 mm
LangID	1
ALPHA_	12.953
Db min.	186 mm
Oil rpm	2600
db max.	115 mm
Da max.	186 mm
ra max.	3 mm
hidYobi	HR32319J
da min.	120 mm
T-ALP21	25
rb max.	2,5 mm
T-ALP22	54
T-ALP23	20
GRS rpm	1900
inner r	4
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	3
outer rb	2.5
TC-BET22	0

Size (mm)	95x200x71.5
Width (mm)	71,5
Prod_Type3	TRBSR_MD_A
Bearing number	HR32319J
Bore Diameter (mm)	95
Outer Diameter (mm)	200
Calculation factor (e)	0,35
Calculation factor (Y0)	0,96
(Oil) Lubrication Speed	2600 r/min
(Grease) Lubrication Speed	1900 r/min
Basic dynamic load rating (C)	525 kN
Basic static load rating (C0)	710 kN