


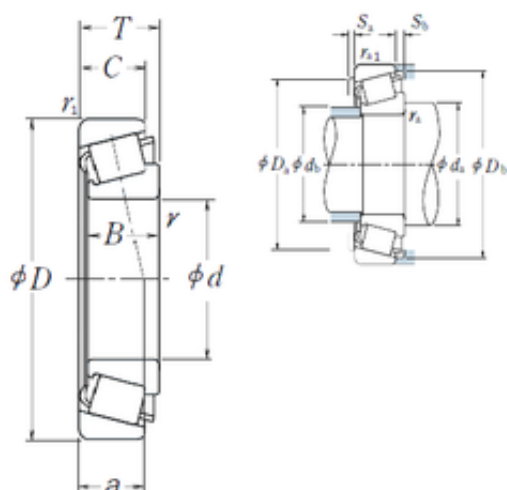

Bearing No. HR32919J

D	130 mm
d	95 mm
T	23 mm
B	23 mm
C	18 mm
a	23,2 mm
e	0.36
Cr	10000
Y0	0.92
db	102
da	106
Y1	1.7
B_	23
Sb	5
C0	172
Sa	5
D_	130
Z_	35
C_	18
C0r	17500
DA_	8.296
Iso	2BC
DE_	120.376
D_b	125
DI_	104.036
SBRG	29
SDM_	112.206
D_a2	121
KBRG	3111
yobi	HR32919J

D_a1	121
mass	0.877
TC-RA	267.26
r min.	1,5 mm
Weight	0,877 Kg
TC-DA1	8.551
TC-DA2	8.04
TC-SLR	16
Da min	121 mm
LangID	1
ALPHA_	13.417
Db min.	125 mm
Oil rpm	3400
db max.	102 mm
Da max.	121 mm
ra max.	1,5 mm
hidYobi	HR32919J
da min.	106 mm
T-ALP21	26
rb max.	1,5 mm
T-ALP22	50
T-ALP23	0
GRS rpm	2400
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	1
inner ra	1.5
outer rb	1.5
TC-BET22	50

Size (mm)	95x130x23
Width (mm)	23
Prod_Type3	TRBSR_MD_A
Bearing number	HR32919J
Bore Diameter (mm)	95
Outer Diameter (mm)	130
Calculation factor (e)	0,36
Calculation factor (Y0)	0,92
(Oil) Lubrication Speed	3400 r/min
(Grease) Lubrication Speed	2400 r/min
Basic dynamic load rating (C)	98 kN
Basic static load rating (C0)	172 kN