


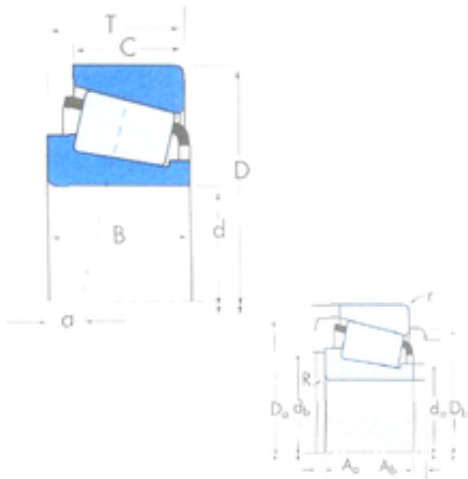

Bearing No. X32216/Y32216

|                                 |               |
|---------------------------------|---------------|
| R                               | 2,5 mm        |
| d                               | 80 mm         |
| D                               | 140 mm        |
| T                               | 35,25 mm      |
| B                               | 33 mm         |
| C                               | 28 mm         |
| r                               | 2 mm          |
| Da                              | 133 mm        |
| Ab                              | 4 mm          |
| Aa                              | 3,9 mm        |
| Db                              | 126 mm        |
| da                              | 89 mm         |
| db                              | 94 mm         |
| a -                             | 4,6 mm        |
| Weight                          | 2,05 Kg       |
| Size (mm)                       | 80x140x35.25  |
| Width (mm)                      | 35,25         |
| Factor (K)                      | 1,39          |
| Factor (G1)                     | 98,4          |
| Factor (Cg)                     | 0,0209        |
| Factor (G2)                     | 28,7          |
| Bearing number                  | X32216/Y32216 |
| Bore Diameter (mm)              | 80            |
| Outer Diameter (mm)             | 140           |
| Calculation factor (e)          | 0,42          |
| Basic static load rating (C0)   | 249 kN        |
| Basic dynamic load rating (C1)  | 190 kN        |
| Basic dynamic load rating (C90) | 49,4          |

|                                  |      |
|----------------------------------|------|
| Basic dynamic load rating (Ca90) | 35,5 |
|----------------------------------|------|