




Bearing No. 23252-E1A-K-MB1

|                     |                                          |
|---------------------|------------------------------------------|
| m                   | 134 kg / Weight                          |
| d                   | 260 mm                                   |
| D                   | 480 mm                                   |
| B                   | 174 mm                                   |
| e                   | 0,36                                     |
| Size (mm)           | 260x480x174                              |
| Width (mm)          | 174                                      |
| $n_s$               | 23,5 mm                                  |
| $Y_1$               | 1,87                                     |
| $Y_2$               | 2,79                                     |
| $D_1$               | 404,3 mm                                 |
| $d_s$               | 12,5 mm                                  |
| $Y_0$               | 1,83                                     |
| $n_G$               | 1360 1/min / Limiting speed              |
| $n_B$               | 690 1/min / Reference speed              |
| $C_r$               | 3350000 N / Dynamic load rating (radial) |
| $C_{0r}$            | 4750000 N / Static load rating (radial)  |
| Bearing number      | 23252-E1A-K-MB1                          |
| $C_{ur}$            | 360000 N                                 |
| $r_{min}$           | 5 mm                                     |
| $r_{a \max}$        | 4 mm                                     |
| $d_{a \min}$        | 280 mm                                   |
| $D_{a \max}$        | 460 mm                                   |
| Bore Diameter (mm)  | 260                                      |
| Outer Diameter (mm) | 480                                      |

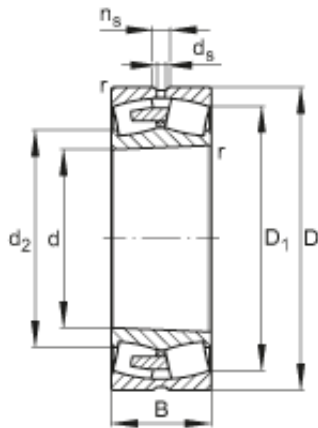