


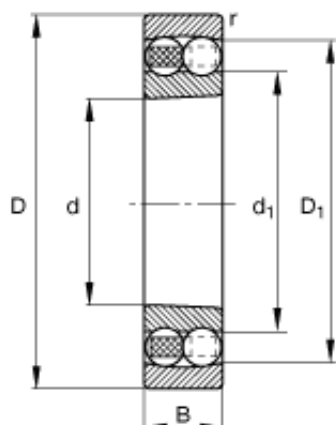

Bearing No. 1208-K-TVH-C3

e	0,22
m	0,408 kg / Weight
d	40 mm
D	80 mm
B	18 mm
Size (mm)	40x80x18
Width (mm)	18
C_r	19400 N / Dynamic load rating (radial)
Y_2	4,49
D_1	67,8 mm
d_1	54 mm
Y_0	3,04
Y_1	2,9
n_G	10000 1/min / Limiting speed
n_B	11600 1/min / Reference speed
C_{0r}	6500 N / Static load rating (radial)
Bearing number	1208-K-TVH-C3
C_{ur}	400 N / Fatigue limit load, radial
r_{min}	1,1 mm
$d_{a min}$	47 mm
$D_{a max}$	73 mm
$r_{a max}$	1 mm
Bore Diameter (mm)	40
Outer Diameter (mm)	80