


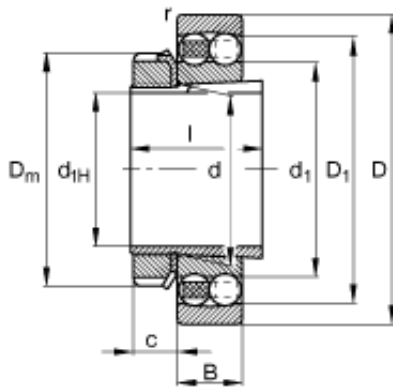

Bearing No. 1208-K-TVH-C3 + H208

	H208 / Adapter sleeve
d	40 mm
m	0,408 kg / Weight
e	0,22
D	80 mm
B	18 mm
l	31 mm
c	11 mm
Size (mm)	35x80x18
Width (mm)	18
m_1	0,18 kg / Weight, adapter sleeve
Y_1	2,9
d_1	54 mm
Y_2	4,49
D_m	58 mm
C_r	19400 N / Dynamic load rating (radial)
D_1	67,8 mm
Y_0	3,04
n_G	10000 1/min / Limiting speed
n_B	11600 1/min / Reference speed
C_{0r}	6500 N / Static load rating (radial)
Bearing number	1208-K-TVH-C3 + H208
C_{ur}	400 N / Fatigue limit load, radial
d_{1H}	35 mm
$r_{a \max}$	1 mm

$d_{b \text{ min}}$	43 mm
$D_{a \text{ max}}$	73 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	47 mm
Bore Diameter (mm)	35
Outer Diameter (mm)	80