


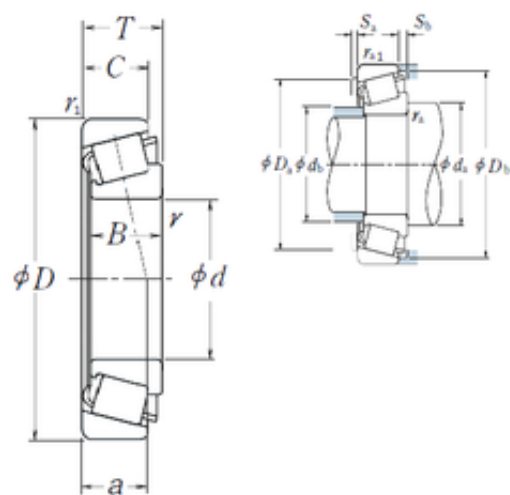

Bearing No. HR32222J

D	200 mm
d	110 mm
T	56 mm
B	53 mm
C	46 mm
a	47,2 mm
e	0.42
Cr	40500
Y0	0.79
db	127
da	128
Y1	1.4
B_	53
Sb	10
C0	565
Sa	5
D_	200
Z_	19
C_	46
C0r	57500
DA_	22.865
Iso	3FC
DE_	176.902
D_b	190
DI_	132.082
SBRG	22
SDM_	154.492
D_a2	171
KBRG	3111
yobi	HR32222J

D_a1	188
mass	7.35
TC-RA	346.5
r min.	3 mm
Weight	7,35 Kg
TC-DA1	24.184
TC-DA2	21.546
TC-SLR	38
Da min	171 mm
LangID	1
ALPHA_	15.643
Db min.	190 mm
Oil rpm	2400
db max.	127 mm
Da max.	188 mm
ra max.	2,5 mm
hidYobi	HR32222J
da min.	128 mm
T-ALP21	31
rb max.	2 mm
T-ALP22	17
T-ALP23	4
GRS rpm	1800
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2.5
outer rb	2
TC-BET22	0

Size (mm)	110x200x56
Width (mm)	56
Prod_Type3	TRBSR_MD_A
Bearing number	HR32222J
Bore Diameter (mm)	110
Outer Diameter (mm)	200
Calculation factor (e)	0,42
Calculation factor (Y0)	0,79
(Oil) Lubrication Speed	2400 r/min
(Grease) Lubrication Speed	1800 r/min
Basic dynamic load rating (C)	400 kN
Basic static load rating (C0)	565 kN