


Bearing No. TASE30-N

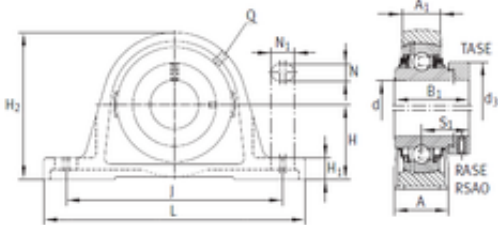

N	14 mm
d	30 mm
A	40 mm
H	42,9 mm
J	118 mm
L	158 mm
N1	22 mm
S1	30,2 mm
d3	44 mm
A1	25 mm
B1	48,5 mm
H1	17 mm
H2	82 mm
Noun	Bearing
Bore	1.181 Inch 30 Millimeter
Seals	Double Triply
UNSPSC	31171511
Weight	1,2 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	2.867
Product Group	M06110
Housing Style	2 Bolt Pillow Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Radial Standard Shaft Height Metric With Set Screw

Bearing number	TASE30-N
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Length Thru Bore	1.906 Inch 48.4 Millimeter
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Long Description	2 Bolt Pillow Block; 30MM Bore; 42.9MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 108MM Minimum Bolt Spacing; 127MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Triply; No
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	1.3
Bore Diameter (mm)	30
Insert Part Number	GE30KPPB3
Bolt Spacing Maximum	5 Inch 127Millimeter
Bolt Spacing Minimum	4.252 Inch 108Millimeter
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Base to Center Height	1.689 Inch 42.9 Millimeter
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	TASE30
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Nominal Bolt Center to Center	4.6 Inch 118 Millimeter

Basic dynamic load rating (C)	19,5 kN
-------------------------------	---------