


Bearing No. TASE70

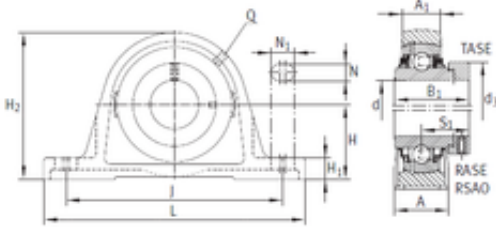

| | |
|----------------|---|
| N | 22 mm |
| d | 70 mm |
| A | 65 mm |
| H | 79,4 mm |
| J | 203 mm |
| L | 260 mm |
| N1 | 28 mm |
| S1 | 44,6 mm |
| d3 | 96 mm |
| A1 | 44 mm |
| B1 | 66 mm |
| H1 | 27,5 mm |
| H2 | 156 mm |
| Noun | Bearing |
| Bore | 2.756 Inch 70 Millimeter |
| Seals | Double Triply |
| UNSPSC | 31171511 |
| Weight | 6,09 Kg |
| Category | Pillow Block |
| Inventory | 0.0 |
| Thread (Q) | Rp1/8 |
| Weight / LBS | 14.134 |
| Product Group | M06110 |
| Housing Style | 2 Bolt Pillow Block |
| Inch - Metric | Metric |
| Relubricatable | Yes |
| Keyword String | Pillow Block |
| Other Features | Single Row Standard Shaft Height With Set Screw |

| | |
|-------------------------------|---|
| Bearing number | TASE70 |
| Mounting Method | Eccentric Collar |
| Rolling Element | Ball Bearing |
| Length Thru Bore | 2.602 Inch 66.1 Millimeter |
| Manufacturer URL | http://www.ina.com |
| Housing Material | Cast Iron |
| Long Description | 2 Bolt Pillow Block; 70MM Bore; 79.4MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 196.5MM Minimum Bolt Spacing; 208.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Triply |
| Manufacturer Name | SCHAEFFLER GROUP |
| Weight / Kilogram | 7.365 |
| Bore Diameter (mm) | 70 |
| Insert Part Number | GE70KPPB3 |
| Bolt Spacing Minimum | 7.736 Inch 196.5Millimeter |
| Bolt Spacing Maximum | 8.209 Inch 208.5Millimeter |
| Minimum Buy Quantity | N/A |
| Housing Configuration | 1 Piece Solid |
| Base to Center Height | 3.126 Inch 79.4 Millimeter |
| Harmonized Tariff Code | 8483.20.40.40 |
| Manufacturer Item Number | TASE70 |
| Number of Mounting Holes | 2 |
| Expansion / Non- expansion | Non-expansion |
| Actual Bolt Center to | 0 Inch 0Millimeter |

| | |
|-------------------------------|-------------------------|
| Center | |
| Nominal Bolt Center to Center | 8 Inch 203 Millimeter |
| Basic dynamic load rating (C) | 62 kN |