


Bearing No. TASE75

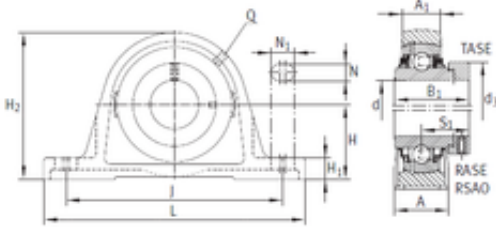

N	22 mm
d	75 mm
A	66 mm
H	82,5 mm
J	210 mm
L	265 mm
N1	30 mm
S1	45,6 mm
d3	100 mm
A1	48 mm
B1	67 mm
H1	27,5 mm
H2	164 mm
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
Seals	Double Triply
Weight	7,65 Kg
UNSPSC	31171511
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	16.604
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Standard Shaft Height With Set Screw

Bearing number	TASE75
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Long Description	2 Bolt Pillow Block; 75MM Bore; 82.6MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 204MM Minimum Bolt Spacing; 218MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Triply; No
Length Thru Bore	2.642 Inch 67.1 Millimeter
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Weight / Kilogram	9.161
Manufacturer Name	SCHAEFFLER GROUP
Bore Diameter (mm)	75
Insert Part Number	GE75KPPB3
Minimum Buy Quantity	N/A
Bolt Spacing Maximum	8.583 Inch 218Millimeter
Bolt Spacing Minimum	8.031 Inch 204Millimeter
Housing Configuration	1 Piece Solid
Base to Center Height	3.252 Inch 82.6 Millimeter
Harmonized Tariff Code	8483.20.40.40
Number of Mounting Holes	2
Manufacturer Item Number	TASE75
Expansion / Non- expansion	Non-expansion
Actual Bolt Center to	0 Inch 0Millimeter

Center	
Basic dynamic load rating (C)	62 kN
Nominal Bolt Center to Center	8.3 Inch 210 Millimeter