


Bearing No. TASE80

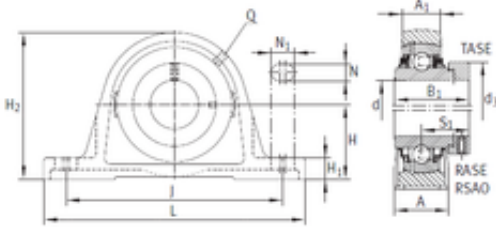

N	26 mm
d	80 mm
A	78 mm
H	89 mm
J	232 mm
L	290 mm
N1	34 mm
S1	47,6 mm
d3	108 mm
A1	55 mm
B1	71 mm
H1	30 mm
H2	175 mm
Noun	Bearing
Bore	3.15 Inch 80 Millimeter
Seals	Double Triply
Weight	8,49 Kg
UNSPSC	31171511
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	19.073
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Standard Shaft Height With Set Screw
Bearing number	TASE80

Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Long Description	2 Bolt Pillow Block; 80MM Bore; 88.9MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 224MM Minimum Bolt Spacing; 240MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Triply; No
Length Thru Bore	2.795 Inch 71 Millimeter
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Weight / Kilogram	10.358
Manufacturer Name	SCHAEFFLER GROUP
Bore Diameter (mm)	80
Insert Part Number	GE80KPPB3
Minimum Buy Quantity	N/A
Bolt Spacing Minimum	8.819 Inch 224Millimeter
Bolt Spacing Maximum	9.449 Inch 240Millimeter
Housing Configuration	1 Piece Solid
Base to Center Height	3.5 Inch 88.9 Millimeter
Harmonized Tariff Code	8483.20.40.40
Number of Mounting Holes	2
Manufacturer Item Number	TASE80
Expansion / Non- expansion	Non-expansion
Actual Bolt Center to Center	0 Inch 0Millimeter
Basic dynamic load	72 kN

rating (C)	
Nominal Bolt Center to Center	9.1 Inch 232 Millimeter