


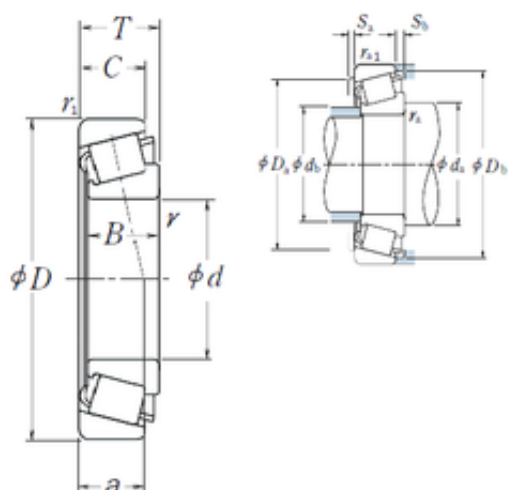

Bearing No. HR32203J

D	40 mm
d	17 mm
T	17,25 mm
B	16 mm
C	14 mm
a	11,2 mm
e	0.31
Cr	2770
Y0	1.1
db	22
da	26
Y1	1.9
B_	16
Sb	3
C0	28
Sa	2
D_	40
Z_	14
C_	14
C0r	2860
DA_	5.641
Iso	2DD
DE_	34.082
D_b	37
DI_	23.194
SBRG	22
SDM_	28.638
D_a2	34
KBRG	3111
yobi	HR32203J

D_a1	34
mass	0.103
TC-RA	89.951
r min.	1 mm
Weight	0,103 Kg
TC-DA1	6.017
TC-DA2	5.264
TC-SLR	11.3
Da min	34 mm
LangID	1
ALPHA_	11.75
Db min.	37 mm
Oil rpm	13000
db max.	22 mm
Da max.	34 mm
ra max.	1 mm
hidYobi	HR32203J
da min.	26 mm
T-ALP21	23
rb max.	1 mm
T-ALP22	30
T-ALP23	0
GRS rpm	9500
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	1
outer rb	1
TC-BET22	50

Size (mm)	17x40x17.25
Width (mm)	17,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR32203J
Bore Diameter (mm)	17
Outer Diameter (mm)	40
Calculation factor (e)	0,31
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	13000 r/min
(Grease) Lubrication Speed	9500 r/min
Basic dynamic load rating (C)	27,1 kN
Basic static load rating (C0)	28 kN