


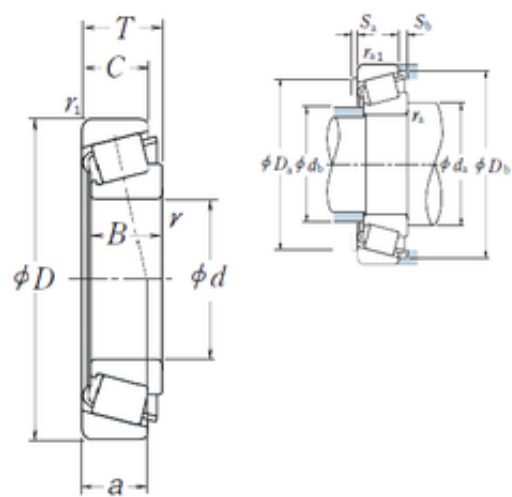

Bearing No. HR32024XJ

a	39,7 mm
e	0.46
d	120 mm
D	180 mm
T	38 mm
B	38 mm
C	29 mm
B_	38
da	135
Y0	0.72
C0	405
D_	180
Sb	9
Sa	7
db	131
Z_	27
Y1	1.3
C_	29
Cr	24600
DE_	164.105
Iso	4DC
DI_	135.751
C0r	41000
DA_	14.703
D_b	173
D_a2	162
SBRG	20
SDM_	149.928
D_a1	170
yobi	HR32024XJ

KBRG	3111
mass	3.27
TC-RA	294.8
r min.	2,5 mm
LangID	1
TC-DA2	13.973
Da min	162 mm
TC-SLR	28
ALPHA_	17
TC-DA1	15.433
Weight	3,27 Kg
T-ALP22	0
da min.	135 mm
r1 min.	2 mm
T-ALP21	34
db max.	131 mm
hidYobi	HR32024XJ
rb max.	2 mm
T-ALP23	0
Da max.	170 mm
Oil rpm	2400
GRS rpm	1800
ra max.	2 mm
inner r	2.5
Db min.	173 mm
outer r	2
inner ra	2
hidTable	ecat_NSTPRM
outer rb	2
Category	Bearings
TC-BET23	0
TC-BET21	3

TC-BET22	0
Inventory	0.0
Size (mm)	120x180x38
Prod_Type3	TRBSR_MD_A
Width (mm)	38
Product Group	B04334
Bearing number	HR32024XJ
Weight / Kilogram	0.05
Manufacturer Name	NSK
Bore Diameter (mm)	120
Outer Diameter (mm)	180
Minimum Buy Quantity	N/A
Calculation factor (e)	0,46
(Oil) Lubrication Speed	2400 r/min
Calculation factor (Y0)	0,72
(Grease) Lubrication Speed	1800 r/min
Basic dynamic load rating (C)	242 kN
Basic static load rating (C0)	405 kN