


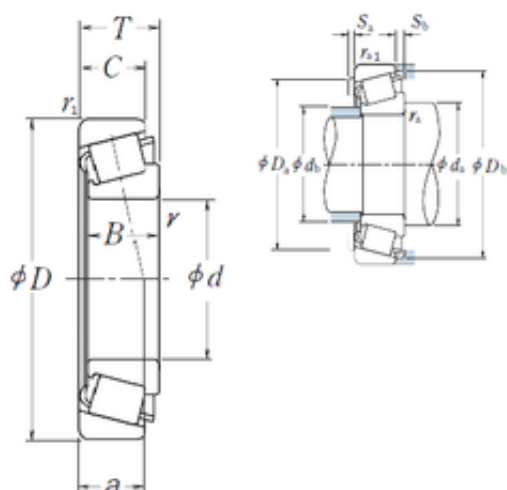

Bearing No. HR30240J

D	360 mm
d	200 mm
T	64 mm
B	58 mm
C	48 mm
a	68,7 mm
e	0.44
Cr	84000
Y0	0.76
db	236
da	227
Y1	1.4
B_	58
Sb	16
C0	1180
Sa	10
D_	360
Z_	20
C_	48
C0r	121000
DA_	40.147
Iso	4GB
DE_	321.116
D_b	336
DI_	242.397
SBRG	2
SDM_	281.757
D_a2	318
KBRG	3111
yobi	HR30240J

D_a1	342
mass	25.1
TC-RA	595.9
r min.	5 mm
Weight	25,1 Kg
TC-DA1	41.59
TC-DA2	38.703
TC-SLR	41.75
Da min	318 mm
LangID	1
ALPHA_	16.173
Db min.	336 mm
Oil rpm	1300
db max.	236 mm
Da max.	342 mm
ra max.	4 mm
hidYobi	HR30240J
da min.	227 mm
T-ALP21	32
rb max.	3 mm
T-ALP22	20
T-ALP23	40
GRS rpm	950
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	200x360x64
Width (mm)	64
Prod_Type3	TRBSR_MD_A
Bearing number	HR30240J
Bore Diameter (mm)	200
Outer Diameter (mm)	360
Calculation factor (e)	0,44
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	1300 r/min
(Grease) Lubrication Speed	950 r/min
Basic dynamic load rating (C)	825 kN
Basic static load rating (C0)	1180 kN