


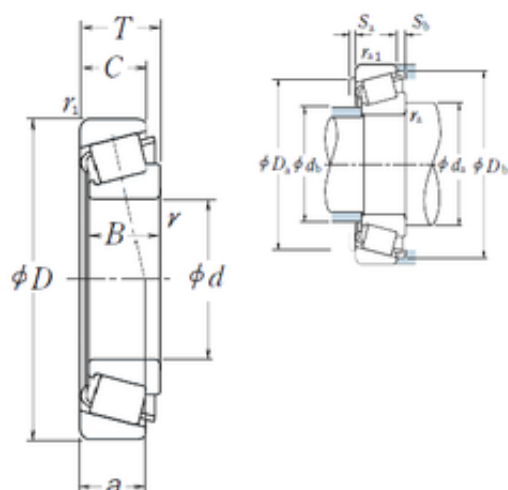

Bearing No. HR30207C

D	72 mm
d	35 mm
T	18,25 mm
B	17 mm
C	13 mm
a	19,6 mm
e	0.66
Cr	4750
Y0	0.5
db	44
da	46
Y1	0.91
B_	17
Sb	5
C0	54.5
Sa	3
D_	72
Z_	18
C_	13
C0r	5550
DA_	7.965
Iso	-
DE_	61.3
D_b	68
DI_	46.099
SBRG	2
SDM_	53.7
D_a2	59
KBRG	3111
yobi	HR30207C

D_a1	63
mass	0.331
TC-RA	82.053
r min.	1,5 mm
Weight	0,331 Kg
TC-DA1	8.587
TC-DA2	7.343
TC-SLR	12
Da min	59 mm
LangID	1
ALPHA_	23.667
Db min.	68 mm
Oil rpm	6700
db max.	44 mm
Da max.	63 mm
ra max.	1,5 mm
hidYobi	HR30207C
da min.	46 mm
T-ALP21	47
rb max.	1,5 mm
T-ALP22	20
T-ALP23	0
GRS rpm	5000
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	6
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	35x72x18.25
Width (mm)	18,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR30207C
Bore Diameter (mm)	35
Outer Diameter (mm)	72
Calculation factor (e)	0,66
Calculation factor (Y0)	0,5
(Oil) Lubrication Speed	6700 r/min
(Grease) Lubrication Speed	5000 r/min
Basic dynamic load rating (C)	47 kN
Basic static load rating (C0)	54,5 kN