


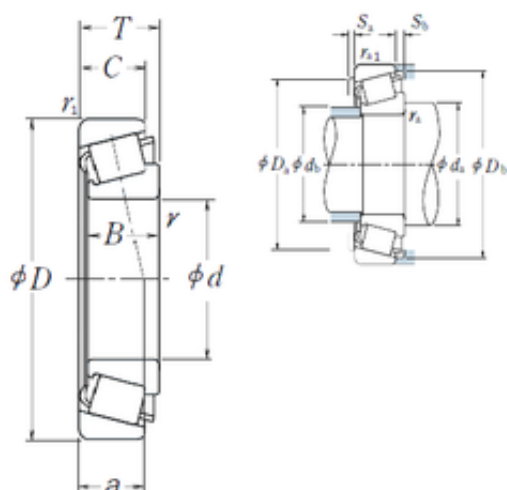

Bearing No. HR302/28C

D	58 mm
d	28 mm
T	17,25 mm
B	16 mm
C	12 mm
a	16,9 mm
e	0.64
Cr	3450
Y0	0.52
db	34
da	37
Y1	0.94
B_	16
Sb	5
C0	38.5
Sa	2
D_	58
Z_	17
C_	12
C0r	3900
DA_	6.56
Iso	-
DE_	49.577
D_b	54
DI_	36.741
SBRG	2
SDM_	43.159
D_a2	48
KBRG	3111
yobi	HR302/28C

D_a1	52
mass	0.198
TC-RA	68.136
r min.	1 mm
Weight	0,198 Kg
TC-DA1	7.131
TC-DA2	5.989
TC-SLR	11
Da min	48 mm
LangID	1
ALPHA_	23.083
Db min.	54 mm
Oil rpm	8500
db max.	34 mm
Da max.	52 mm
ra max.	1 mm
hidYobi	HR302/28C
da min.	37 mm
T-ALP21	46
rb max.	1 mm
T-ALP22	10
T-ALP23	0
GRS rpm	6300
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	6
inner ra	1
outer rb	1
TC-BET22	0

Size (mm)	28x58x17.25
Width (mm)	17,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR302/28C
Bore Diameter (mm)	28
Outer Diameter (mm)	58
Calculation factor (e)	0,64
Calculation factor (Y0)	0,52
(Oil) Lubrication Speed	8500 r/min
(Grease) Lubrication Speed	6300 r/min
Basic dynamic load rating (C)	34 kN
Basic static load rating (C0)	38,5 kN