


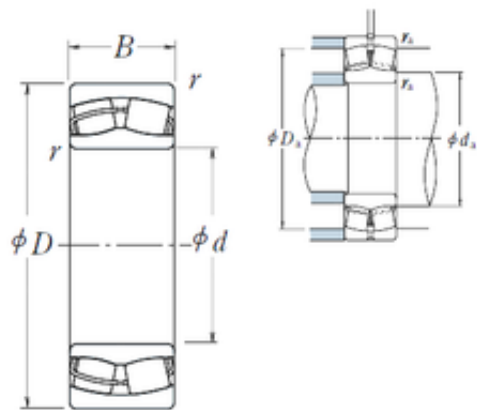

Bearing No. 23032CDE4

e	0.22
r	2.1
d	160 mm
D	240 mm
B	60 mm
C	60 mm
Y3	3
C0	955
X2	0.67
X1	1
X0	1
Y0	2.9
ra	2
Z_	27
B_	60
Y2	4.5
D_	240
Y1	3
DE_	220.551
SIR	24
DA_	19.5
DI_	181.979
ALP3	0
KBRG	2321
Noun	Bearing
mass	9.66
SDM_	201.265
yobi	23032CDE4
Bore	6.299 Inch 160 Millimeter

bomp	23032CDE4
ALP2	30
ALP1	8
SBRG	30
Width	2.362 Inch 60 Millimeter
Da min	216 mm
UNSPSC	31171510
Weight	9,66 Kg
ALPHA_	0.148
da max	179 mm
da min	172
r min.	2,1 mm
LangID	1
da min.	172 mm
GRS rpm	1300
hidYobi	23032CDE4
Oil rpm	1700
TSR rpm	2400
Da max.	228 mm
ra max.	2 mm
D_a max	228
series:	230
D_a min	216
hidTable	ecat_NSSPHR
Category	Spherical Roller Bearing
Enclosure	Open
Inventory	0.0
Size (mm)	160x240x60
Macha rpm	0
Width (mm)	60
Prod_Type3	SRB_CTB_CB
bore type:	Straight

cage type:	Inner Ring Guided
Weight / LBS	9.5
Bore Profile	Straight
maximum rpm:	1700 RPM
closure type:	Open
Product Group	B04311
Inch - Metric	Metric
Cage Material	Steel
Bearing number	23032CDE4
overall width:	60 mm
bore diameter:	160 mm
Relubricatable	Yes
fillet radius:	2.1 mm
Keyword String	Spherical
cage material:	Steel
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
finish/coating:	Uncoated
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	9.449 Inch 240 Millimeter
Long Description	160MM Straight Bore; 240MM Outside Diameter; 60MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
outer ring type:	Not Split
outside diameter:	240 mm
Withdrawal Sleeve	Not Applicable

bearing material:	Steel
Manufacturer Name	NSK
Weight / Kilogram	9.5
outer ring width:	60 mm
precision rating:	RBEC 1 (ISO Class Normal)
Bore Diameter (mm)	160
Internal Clearance	C0-Medium
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Outer Diameter (mm)	240
internal clearance:	C0
Minimum Buy Quantity	N/A
static load capacity:	955000 N
Calculation factor (e)	0,22
lubrication hole type:	Lubrication Groove & Hole
dynamic load capacity:	540000 N
Harmonized Tariff Code	84823080
Calculation factor (Y2)	4,5
(Oil) Lubrication Speed	1700 r/min
Calculation factor (Y0)	2,9
Manufacturer Item Number	23032CDE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1300 r/min
operating temperature range:	Maximum of +200 °C
Basic static load rating (C0)	955 kN
Basic dynamic load rating (C)	540 kN