


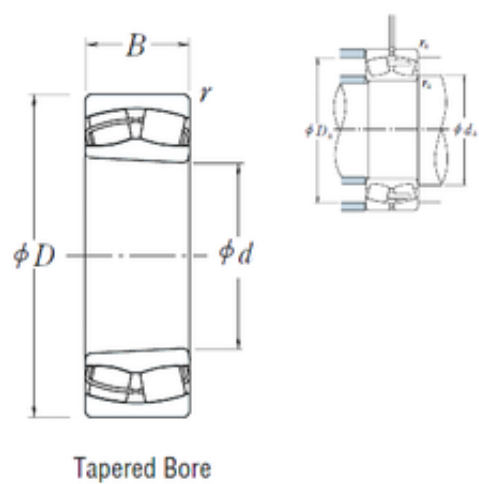

Bearing No. 23032CDKE4

e	0.22
r	2.1
d	160 mm
D	240 mm
B	60 mm
C	60 mm
Y0	2.9
C0	955
X2	0.67
X1	1
X0	1
Y3	3
ra	2
Z_	27
Y1	2.9
D_	240
Y2	4.5
B_	60
DE_	220.551
SIR	24
DA_	19.5
DI_	181.979
ALP3	0
yobi	23032CDKE4
SBRG	30
KBRG	2321
Bore	6.299 Inch 160 Millimeter
SDM_	201.265
mass	9.66

Noun	Bearing
bomp	23032CDKE4
ALP1	8
ALP2	30
Width	2.362 Inch 60 Millimeter
Da min	216 mm
r min.	2,1 mm
LangID	1
ALPHA_	0.148
Weight	9,66 Kg
da min	172
UNSPSC	31171510
da max	179 mm
hidYobi	23032CDKE4
da min.	172 mm
GRS rpm	1300
D_a min	216
TSR rpm	2400
Da max.	228 mm
ra max.	2 mm
D_a max	228
Oil rpm	1700
Category	Spherical Roller Bearing
hidTable	ecat_NSSPHR
Size (mm)	160x240x60
Inventory	0.0
Enclosure	Open
Macha rpm	0
Prod_Type3	SRB_CTB_TB
Width (mm)	60
Weight / LBS	9.36
Bore Profile	Tapered

Inch - Metric	Metric
Cage Material	Steel
Product Group	B04311
Bearing number	23032CDKE4
Relubricatable	Yes
Keyword String	Spherical
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
Mounting Method	Adapter Mount
Rolling Element	Spherical Roller Bearing
Outside Diameter	9.449 Inch 240 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	160MM Tapered Bore; 240MM Outside Diameter; 60MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable; Adapter Part N
Withdrawal Sleeve	AH3032 (Specify bore)
Manufacturer Name	NSK
Weight / Kilogram	9.36
Internal Clearance	C0-Medium
Bore Diameter (mm)	160
Adapter Part Number	SNW3032 H3032 HA3032 HE3032 (Specify Bore) Inch H3032 (Specify bore) Millimeter
Outer Diameter (mm)	240

Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,22
Calculation factor (Y0)	2,9
(Oil) Lubrication Speed	1700 r/min
Calculation factor (Y2)	4,5
Manufacturer Item Number	23032CDKE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1300 r/min
Basic static load rating (C0)	955 kN
Basic dynamic load rating (C)	540 kN