


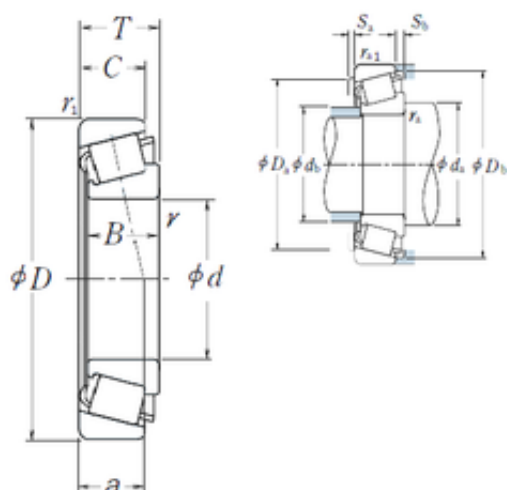

Bearing No. 30336D

D	380 mm
d	180 mm
T	83 mm
B	75 mm
C	53 mm
a	113,1 mm
e	0.81
Cr	83500
Y0	0.41
db	229
da	216
Y1	0.74
B_	75
Sb	30
C0	1120
Sa	10
D_	380
Z_	16
C_	53
C0r	114000
DA_	44.164
Iso	-
DE_	322.777
D_b	352
DI_	241.677
SBRG	3
SDM_	282.227
D_a2	304
KBRG	3111
yobi	30336D

D_a1	362
mass	38.5
TC-RA	362.84
r min.	5 mm
Weight	38,5 Kg
TC-DA1	47.449
TC-DA2	40.878
TC-SLR	51
Da min	304 mm
LangID	1
ALPHA_	28.5
Db min.	352 mm
Oil rpm	1200
db max.	229 mm
Da max.	362 mm
ra max.	4 mm
hidYobi	30336D
da min.	216 mm
T-ALP21	57
rb max.	3 mm
T-ALP22	0
T-ALP23	0
GRS rpm	850
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	7
inner ra	4
outer rb	3
TC-BET22	30

Size (mm)	180x380x83
Width (mm)	83
Prod_Type3	TRBSR_MD_A
Bearing number	30336D
Bore Diameter (mm)	180
Outer Diameter (mm)	380
Calculation factor (e)	0,81
Calculation factor (Y0)	0,41
(Oil) Lubrication Speed	1200 r/min
(Grease) Lubrication Speed	850 r/min
Basic dynamic load rating (C)	820 kN
Basic static load rating (C0)	1120 kN