


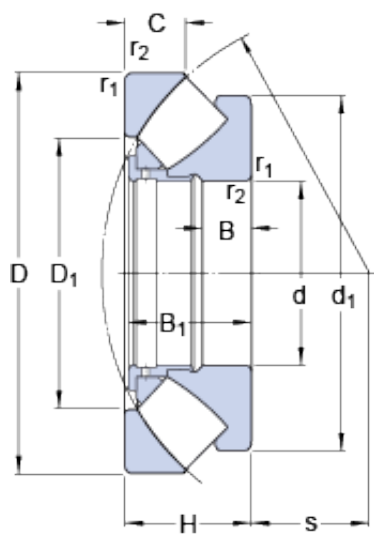

Bearing No. 29392

B	50 mm
s	257 mm
d	460 mm
D	710 mm
H	150 mm
C	72.5 mm
Noun	Bearing
Bore 2	22.323 Inch 567 Millimeter
UNSPSC	31171507
Bore 1	18.11 Inch 460 Millimeter
Banded	No
Height	5.906 Inch 150 Millimeter
Category	Thrust Roller Bearings
Inventory	0.0
Keyword 3	Spherical
Size (mm)	710x460x150
Width (mm)	150
Mass bearing	215 kg
Weight / LBS	473.994
Product Group	B04311
Inch - Metric	Metric
Cage Material	Steel
B ₁	144 mm
D ₁	567 mm
d ₁	685 mm
B ₁	144 mm
Self Aligning	Yes

Keyword String	Thrust Roller Spherical
Other Features	Single Row
Bearing number	29392
Thrust Bearing	Yes
Limiting speed	800 r/min
Precision Class	ABEC 1 ISO P0
Reference speed	450 r/min
Rolling Element	Spherical Roller Bearing
Manufacturer URL	http://www.skf.com
Long Description	460MM Bore 1; 567MM Bore 2; 710MM Outside Diameter; 150MM Height; Spherical Roller Bearing; Single Direction; Self Aligning; Not Banded; Steel Cage; ABEC 1 ISO P0; Roller Assembly plus Raceways
Outside Diameter	27.953 Inch 710 Millimeter
Manufacturer Name	SKF
Weight / Kilogram	233.999
r _a max.	5 mm
D _a max.	630 mm
d _a min.	585 mm
Bore Diameter (mm)	710
Outer Diameter (mm)	460
r _{1,2} min.	6 mm
d _a - min.	585 mm
D _a - max.	630 mm
Minimum Buy Quantity	N/A
r _a - max.	5 mm
d ₁ ?	685 mm
Component Description	Roller Assembly plus Raceways

D ₁ ?	567 mm
Harmonized Tariff Code	8482.30.00.40
r _{1,2} - min.	6 mm
Manufacturer Item Number	29392
Factor min. axial load - A	34
Single or Double Direction	Single Direction
Basic dynamic load rating C	4310 kN
Minimum axial load factor A	34
Basic dynamic load rating - C	4310 kN
Fatigue load limit P _u	1500 kN
Fatigue load limit - P _u	1500 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter
Basic static load rating C ₀	19000 kN
Basic static load rating - C ₀	19000 kN