


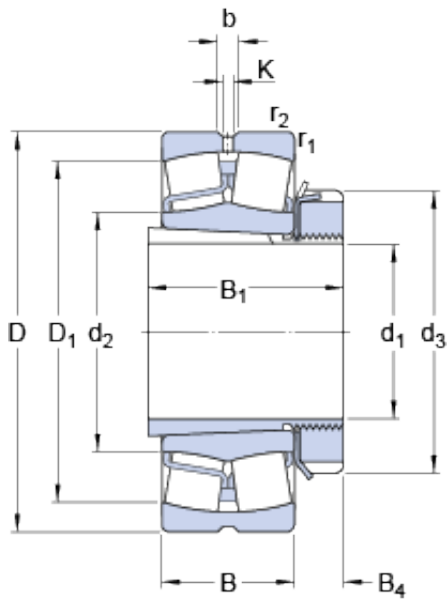

Bearing No. 22317 EK + H 2317

D	180 mm
B	60 mm
b	8.3 mm
K	4.5 mm
Size (mm)	180x75x60
Width (mm)	60
d_3	110 mm
d_1	75 mm
B_4	18 mm
B_1	82 mm
d_1	75 mm
d_2	108 mm
D_1	154 mm
B_1	82 mm
B_4	18 mm
d_3	110 mm
Bearing number	22317 EK + H 2317
Limiting speed	3800 r/min
Reference speed	2800 r/min
Bore Diameter (mm)	180
r_a max.	2.5 mm
B_a min.	7 mm
D_a max.	166 mm
d_b min.	94 mm
d_a max.	108 mm
Outer Diameter (mm)	75
Calculation factor e	0.33
$r_{1,2}$ min.	3 mm
r_a - max.	2.5 mm

B _a - min.	7 mm
D _a - max.	166 mm
d _b - min.	94 mm
d _a - max.	108 mm
d ₂ ?	108 mm
Mass bearing + sleeve	8.85 kg
D ₁ ?	154 mm
Calculation factor - e	0.33
r _{1,2} - min.	3 mm
Basic dynamic load rating C	577 kN
Basic dynamic load rating - C	577 kN
Fatigue load limit P _u	61 kN
Calculation factor Y ₁	2
Calculation factor Y ₂	3
Calculation factor Y ₀	2
Calculation factor - Y ₁	2
Calculation factor - Y ₂	3
Fatigue load limit - P _u	61 kN
Basic static load rating C ₀	620 kN
Basic static load rating - C ₀	620 kN