


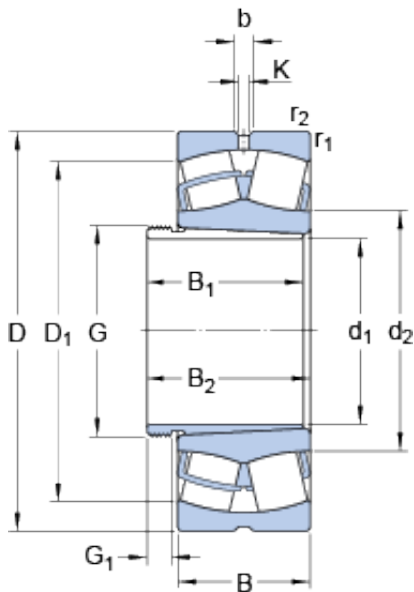

Bearing No. 23036 CCK/W33 + AH 3036

D	280 mm
B	74 mm
b	13.9 mm
K	7.5 mm
G	M 190x3
Size (mm)	280x170x74
Width (mm)	74
d ₂	204 mm
G ₁	190 mm
G ₁	17 mm
B ₁	92 mm
d ₁	170 mm
D ₁	249 mm
B ₁	92 mm
d ₁	170 mm
Bearing number	23036 CCK/W33 + AH 3036
Limiting speed	2600 r/min
Reference speed	2000 r/min
D _a max.	269 mm
r _a max.	2 mm
d _a min.	187 mm
Bore Diameter (mm)	280
Outer Diameter (mm)	170
r _a - max.	2 mm
Calculation factor e	0.24
D _a - max.	269 mm
d _a - min.	187 mm
r _{1,2} min.	2.1 mm
	98 mm

B ² ?	
------------------	--

D_1 ?	249 mm
d_2 ?	204 mm
Mass bearing + sleeve	19.3 kg
$r_{1,2}$ - min.	2.1 mm
Calculation factor - e	0.24
Basic dynamic load rating C	883 kN
Basic dynamic load rating - C	883 kN
Fatigue load limit P_u	114 kN
Calculation factor Y_1	2.8
Calculation factor Y_2	4.2
Calculation factor Y_0	2.8
Calculation factor - Y_2	4.2
Calculation factor - Y_1	2.8
Fatigue load limit - P_u	114 kN
Basic static load rating C_0	1250 kN
Basic static load rating - C_0	1250 kN