


Bearing No. RASE55

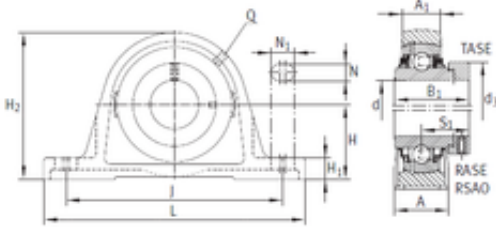

N	18 mm
d	55 mm
A	60 mm
H	63,5 mm
J	176 mm
L	222 mm
N1	30 mm
S1	43,6 mm
d3	76 mm
A1	35 mm
B1	71,4 mm
H1	22,5 mm
H2	124,5 mm
Noun	Bearing
Bore	2.165 Inch 55 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	3,4 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	8.82
Product Group	M06110
Housing Style	2 Bolt Pillow Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Standard Shaft Height With Set

	Screw
Bearing number	RASE55
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Long Description	2 Bolt Pillow Block; 55MM Bore; 63.5MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 164.5MM Minimum Bolt Spacing; 187MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Rid
Length Thru Bore	2.811 Inch 71.4 Millimeter
Manufacturer URL	http://www.ina.com
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	4
Bore Diameter (mm)	55
Insert Part Number	GE55KRRB
Minimum Buy Quantity	N/A
Bolt Spacing Maximum	7.362 Inch 187Millimeter
Bolt Spacing Minimum	6.476 Inch 164.5Millimeter
Base to Center Height	2.5 Inch 63.5 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RASE55
Number of Mounting Holes	2
Expansion / Non-expansion	Non-expansion
Actual Bolt Center to	0 Inch 0Millimeter

Center	
Basic dynamic load rating (C)	43,5 kN
Nominal Bolt Center to Center	6.8 Inch 171.5 Millimeter