




Bearing No. SL192313

F	80,69 mm
d	65 mm
D	140 mm
B	48 mm
s	3,5 mm / Axial displacement
m	3,52 kg / Weight
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
Width	1.89 Inch 48 Millimeter
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	No
Inventory	0.0
Separable	Inner Ring - One Side
Size (mm)	65x140x48
Snap Ring	No
Width (mm)	48
Weight / LBS	9.293
Bore Profile	Straight
Cage Material	None
Product Group	B04144
Inch - Metric	Metric
n_G	3200 1/min / Limiting speed
d_1	90 mm
D_1	116,5 mm

C _r	350000 N / Dynamic load rating (radial)
Relubricatable	Yes
Other Features	Full Complement 1 Rib Inner Ring 2 Rib Outer Ring Operating Temperature From -30 to 120 Deg
Bearing number	SL192313
C _{ur}	66000 N / Fatigue limit load, radial
C _{0r}	345000 N / Static load rating (radial)
r _{min}	2,1 mm
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Long Description	65MM Bore; Straight Bore Profile; 140MM Outside Diameter; 48MM Width; RBEC 1 ISO P0; Single Row; Inner Ring - One Side Separable; No Snap Ring; Relubricatable; C0-Medium Internal Clearance; No Retai
Manufacturer URL	http://www.ina.com
Outside Diameter	5.512 Inch 140 Millimeter
Weight / Kilogram	4.219
Manufacturer Name	SCHAEFFLER GROUP
Internal Clearance	C0-Medium
Bore Diameter (mm)	65
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.50.00.00

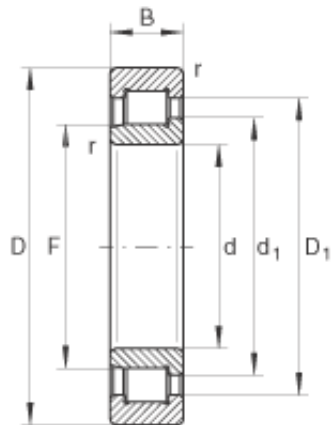

Manufacturer Item Number	SL192313
Number of Rows of Rollers	Single Row